ANTELOPE SUBBASIN (5-021.54) GROUNDWATER SUSTAINABILITY PLAN ANNUAL REPORT – 2023

SUBMITTED BY

TEHAMA COUNTY
FLOOD CONTROL AND WATER CONSERVATION DISTRICT

TEHAMA COUNTY FLOOD CONTROL AND WATER CONSERVATION DISTRICT

PREPARED BY

Luhdorff & Scalmanini
Consulting Engineers

DAVIDS
ENGINEERING, INC

Prepared by Luhdorff and Scalmanini Consulting Engineers and Davids Engineering on behalf of the Tehama County Flood Control and Water Conservation District GSA for the Antelope Subbasin.

TABLE OF CONTENTS

Executive Summary ES-1
1 General Information §356.2(a) 1
2 Groundwater Elevations §356.2(b)(1) 4
3 Water Supply and Use 8
4 Groundwater Storage 12
5 GSP Implementation Progress – §356.2(b)(5)(C) 19
6 Conclusions 27
7 References 27

LIST OF TABLES

Table ES-1. Sustainability Indicator Summary ES-3
Table ES-2. Total Water Use by Water Use Sector ES-7
Table 3-1. Groundwater Use by Water Use Sector 9
Table 3-2. Surface Water Use by Water Use Sector for WY 2023 11
Table 3-3. Total Water Use by Water Use Sector 11
Table 3-4. Estimated Uncertainty in Water Use Estimates 12
Table 4-1. Annual Groundwater Extraction and Change in Storage 14
Table 5-1. Sustainability Indicator Summary 21
Table 5-2. Measurable Objectives, Minimum Thresholds, and Seasonal Groundwater Elevations of Representative Monitoring Site Wells 23
Table 5-3 Measurable Objectives, Minimum Thresholds, Undesirable Results for Depletion of Interconnected Surface Water 26
Table 5-4. Summary of Project Implementation Status 26
Table 5-5. Summary of Management Actions 27

TABLE OF CONTENTS

LIST OF FIGURES

Figure ES-1. Antelope Subbasin and Groundwater Sustainability Agency Boundaries ES-2

Figure ES-2. Groundwater Pumping, Annual and Cumulative Change in Storage from WY 1990 to WY 2023 ..... ES-6

Figure 1-1. Subbasins in the North Sacramento Valley 2

Figure 1-2. Antelope Subbasin and Groundwater Sustainability Agency Boundaries 3

Figure 2-1. Subbasin Contours of Equal Groundwater Elevation for the Upper Aquifer, Spring 2023 (Seasonal High) 6

Figure 2-2. Subbasin Contours of Equal Groundwater Elevation for the Upper Aquifer, Fall 2023 (Seasonal Low) 7

Figure 3-1. Estimated Applied Groundwater – WY 2023 10

Figure 4-1. Groundwater Extraction and Change in Groundwater Storage from WY 1990 to WY 2023 16

Figure 4-2. Change in Groundwater Storage from Spring 2022 to Spring 2023 in the Upper Aquifer 18

Figure 5-1. Change in Subsidence from 10/2022 to 10/2023 25

APPENDICES

Appendix A Hydrographs of Representative Monitoring Site Wells

Appendix B Explanation of Sustainable Management Criteria

Appendix C GSP Annual Reporting Elements Guide

Appendix D DWR Portal Upload Tables

Appendix E Water Use Analysis Methodology

Appendix F Water Quality

LIST OF ACRONYMS AND ABBREVIATIONS

Acronym	Meaning
AEM	Airborne electromagnetic
AF	acre-feet
AFY	acre-feet per year
AMSL	above mean sea level
Tehama County GSA	Tehama Flood Control and Water Conservation District Groundwater Sustainability Agency
DWR	Department of Water Resources
DMS	Data Management System
eWRIMS	Electronic Water Rights Information Management System
GSP	Groundwater Sustainability Plan
GSA	Groundwater Sustainability Agency
InSAR	Interferometric Synthetic Aperture Radar
MO	Measurable Objective
MT	Minimum Threshold
PMA	projects and management action
RMS	representative monitoring site
RMSE	root-mean-squared error
SI	sustainability indicator
SGM	Sustainable Groundwater Management
SGMA	Sustainable Groundwater Management Act
SMC	sustainable management criteria
Subbasin	Antelope Subbasin
SWRCB	State Water Resources Control Board
TDS	Total Dissolved Solids
UR	undesirable result
UWMP	Urban Water Management Plan
WY	Water Year

EXECUTIVE SUMMARY

The Antelope Subbasin (Subbasin) (5-021.54) Annual Report was prepared on behalf of the Tehama County Flood Control and Water Conservation District GSA (Tehama County GSA) to fulfill the statutory requirements set by the Sustainable Groundwater Management Act (SGMA) legislation (§10728) and the Groundwater Sustainability Plan (GSP) regulations (§354.40 and §356.2) developed by the California Department of Water Resources (DWR). The regulations mandate the submission of an Annual Report to DWR by April 1st after the reporting year, which spans the water year (WY) from October 1st to September 30th. This Annual Report includes information from the recent WY 2023 for the Antelope Subbasin, located within Tehama County, shown in **Figure ES-1.**

Measured conditions in the Subbasin are in compliance with Minimum Thresholds (MTs) for all applicable sustainability indicators (SIs). An MT is the quantitative value that represents the groundwater conditions measured at a representative monitoring site (RMS) that, when exceeded individually or in combination with MTs at other monitoring sites, may cause an undesirable result (UR) in the Subbasin per DWR's definition. If groundwater levels are lower than the value of the. Measurable Objectives (MO) for that site, they are moving in the direction of the MT. On the contrary, for the groundwater quality Sustainable Management Criteria (SMC), as the value of the Total Dissolved Solids (TDS) concentrations increase from the MO established for that site, they are moving in the direction of the MT. The SIs and SMC, including MTs, are summarized in **Table ES-1.** Note that seawater intrusion is not an applicable SI in this Subbasin. Each SI is measured at the RMS.

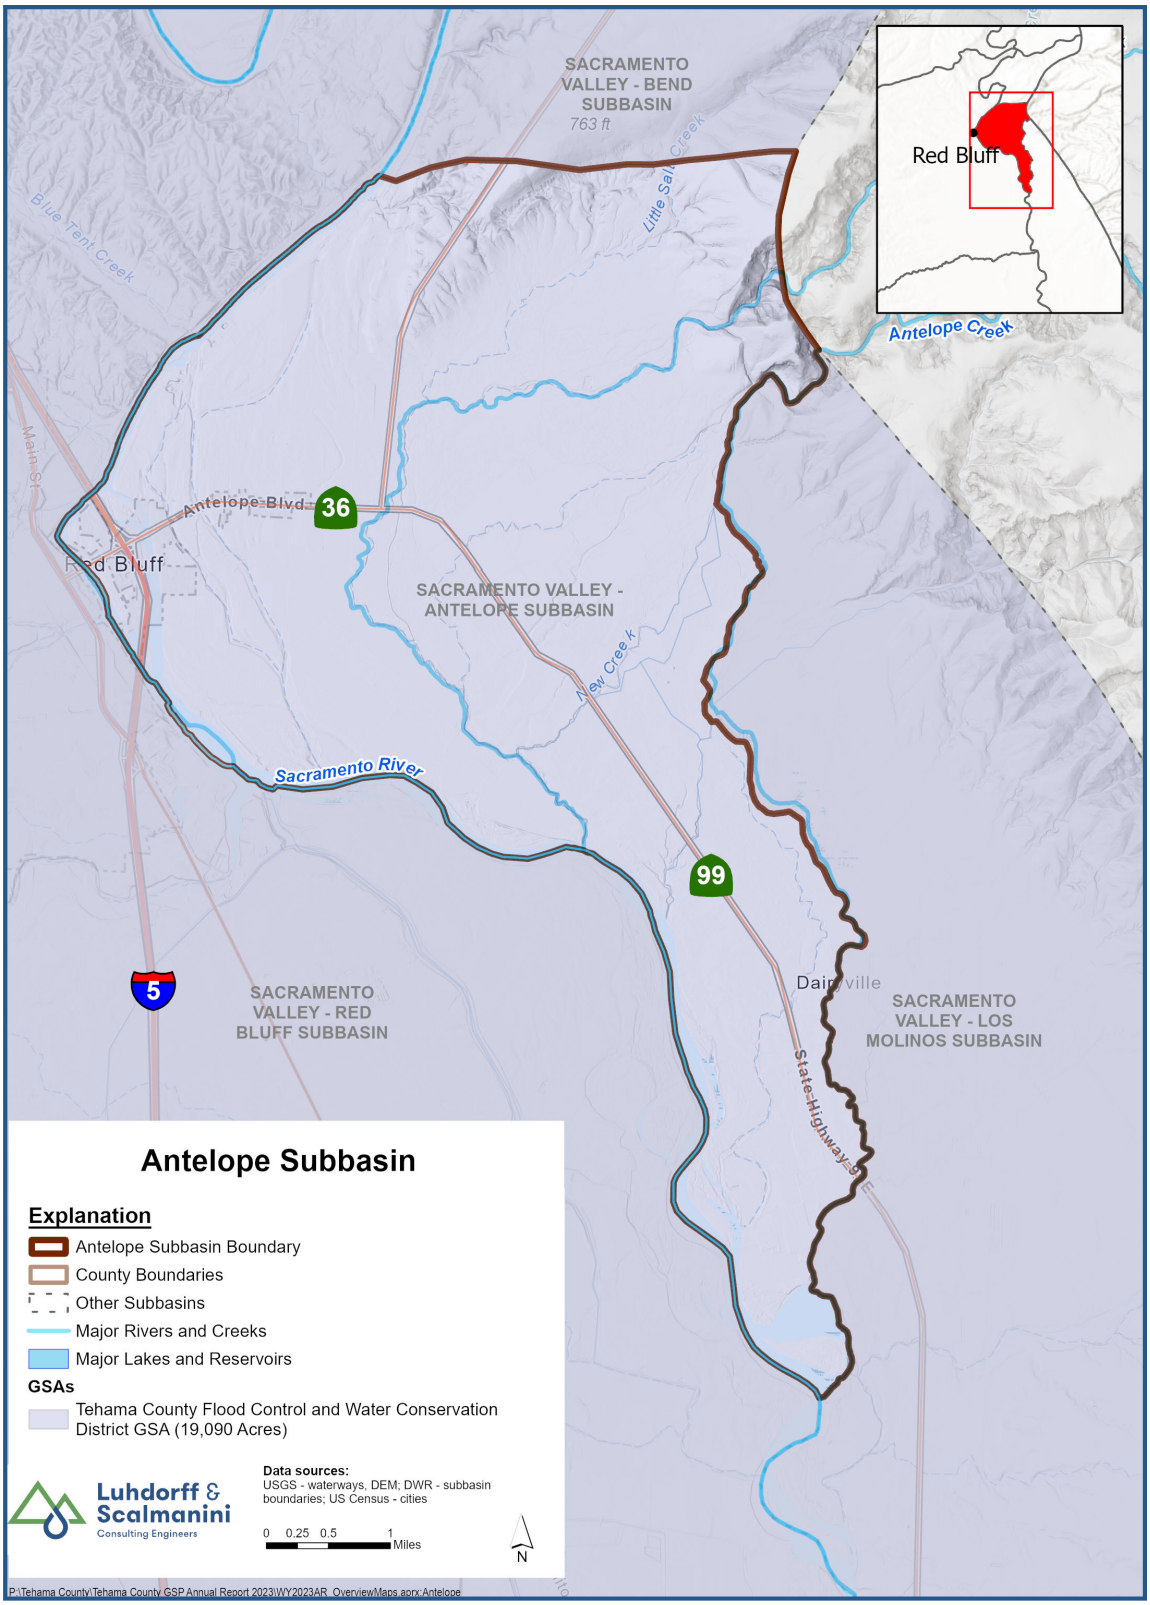


Figure ES-1. Antelope Subbasin and Groundwater Sustainability Agency Boundaries

Table ES-1. Sustainability Indicator Summary			
2023 Status	**Undesirable Result Identification**	**MO Definition**	**MT Definition**
Chronic Lowering of Groundwater Levels			
No indication of undesirable results There were no RMS with spring or fall 2023 groundwater level measurements below the MT.	25% of groundwater elevations measured at same RMS wells exceed the associated MT for two consecutive measurements.	**Upper & Lower Aquifer:** Spring 2015 groundwater elevation minus five feet (for wells with increasing or no groundwater trends) or projected Spring 2024 groundwater elevation minus five feet for wells with declining groundwater elevations.	**Upper Aquifer:** Spring groundwater elevation where less than 10% or less than 20% of domestic wells could potentially be impacted. **Lower Aquifer:** Spring groundwater elevation minus 20 to 120 feet.
Reduction of Groundwater Storage			
No indication of undesirable results There were no RMS with spring or fall 2023 groundwater level measurements below the MT.	Same as the chronic lowering of groundwater levels.	**Upper & Lower Aquifer:** Amount of groundwater storage when groundwater elevations are at their measurable objective.	**Upper & Lower Aquifer:** Amount of groundwater in storage when groundwater elevations are at their minimum threshold.
Degraded Water Quality			
No indication of undesirable results There were no RMS with TDS levels above their MTs.	At least 25% of RMS exceed the minimum threshold for water quality for two consecutive years at each well where it can be established that GSP implementation is the cause of the exceedance	**Upper & Lower Aquifer:** California lower limit secondary MCL concentration for TDS of 500 mg/L measured at RMS wells.	**Upper & Lower Aquifer:** TDS concentration of 750 mg/L at all RMS wells.

Table ES-1. Sustainability Indicator Summary			
2023 Status	**Undesirable Result Identification**	**MO Definition**	**MT Definition**
Land Subsidence			
No indication of undesirable results No InSAR pixel exceeded MT in WY 2023.	50% of RMS exceed the minimum threshold over a 5-year period that is irreversible and is caused by lowering of groundwater elevations.	One foot over 20 years (Zero inelastic subsidence, in addition to any measurement error). If InSAR data are used, the measurement error is 0.1 feet and any measurement 0.1 feet or less would not be considered inelastic subsidence.	Two feet over 20 years (i.e., no more than 0.5 feet of cumulative subsidence over a five-year period (beyond the measurement error), solely due to lowering of groundwater elevations.
Depletion of Interconnected Surface Water			
No indication of undesirable results There were no RMS with spring or fall 2023 groundwater level measurements below the MT.	Same as the chronic lowering of groundwater levels.	Same as the chronic lowering of groundwater levels.	Same as the chronic lowering of groundwater levels.

Notes:

TDS is the primary water quality constituent of concern.

MO = Measurable Objective; MT = Minimum Threshold; RMS = representative monitoring site; mg/L = milligrams per liter; MCL = Maximum Contaminant Level; SMCL = Secondary Maximum Contaminant Level.

.

Current Groundwater Level and Storage Conditions

The current groundwater conditions in the Subbasin are characterized by groundwater elevations that have remained above the MO in Spring 2023 but fell slightly below the MO in Fall 2023. However, water levels in all RMS wells remained above the corresponding MT and remained within the Subbasin's established margin of operational flexibility in WY 2023. Importantly, none of the RMS wells experienced a decline below the MT for 24 consecutive months, hence avoiding undesirable results as defined in the GSP.

Generally, groundwater elevations are, on average, 42 feet above the MT throughout the Subbasin and, on average, 11 feet above the MO in Spring 2023 and 2 feet below the MO in Fall 2023. Elevations are mostly near or slightly higher than those observed in recent years. This positive trend is attributed to the ongoing recovery in groundwater conditions facilitated by increased precipitation which was able to meet evapotranspiration demands.

Fluctuations in groundwater levels and storage within the Subbasin are influenced by the balance between aquifer recharge and extraction. Groundwater levels serve as a proxy for estimating changes in groundwater storage, with observed patterns closely mirroring those in the broader Sacramento Valley. In years characterized by drought and low precipitation, diminished surface water supplies lead to increased extraction and reduced recharge, causing a decline in groundwater storage.

Contrastingly, WY 2023, classified as a Wet WY, marked an increase in cumulative groundwater storage, totaling approximately 8,000 acre-feet (AF) in the Upper and Lower Aquifer. For context, in the past 33 years, the largest decrease in groundwater storage is estimated to be -15,000 AF, and the highest increase was estimated to be 12,000 AF. **Figure ES-2** shows groundwater pumping, as well as annual and cumulative changes in groundwater storage from WY 1990 to WY 2023.

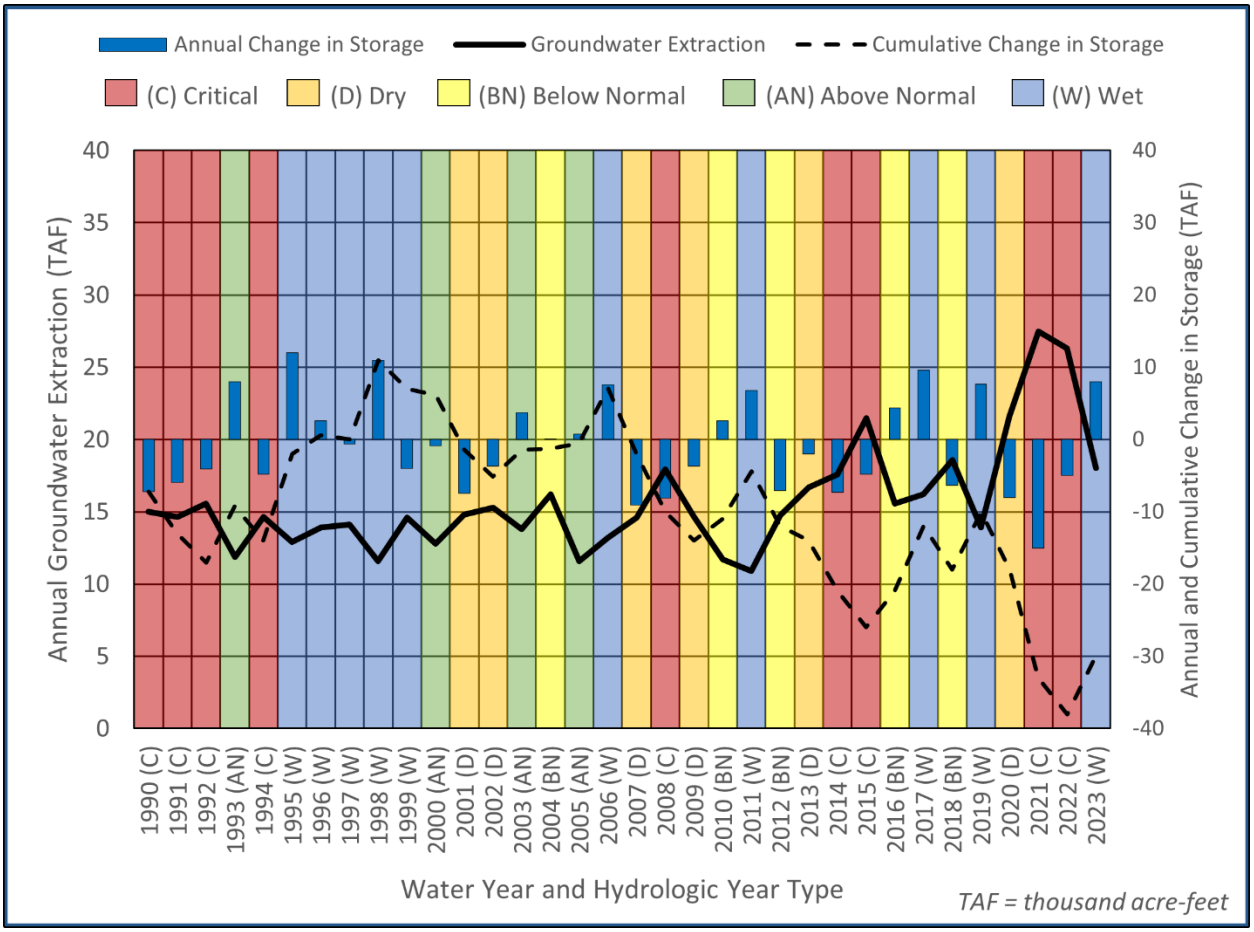


Figure ES-2. Groundwater Pumping, Annual and Cumulative Change in Storage from WY 1990 to WY 2023

Water Use

Groundwater extraction was approximately 18,000 AF in WY 2023, lower than the 26,130 AF extracted in WY 2022. The annual volume of surface water delivered to the Subbasin from surface water features such as Salt Creek and Antelope Creek was about 9,000 AF in WY 2023, lower than the 12,000 AF delivered in WY 2022. The decrease in groundwater extraction in WY 2023 compared to WY 2022 is attributed to increased precipitation in WY 2023, where increased precipitation was able to meet evapotranspiration demands. Despite wet conditions in WY 2023, surface water use decreased slightly from WY 2023 compared to WY 2022.

Groundwater provides the majority (65%) of the water for agriculture in the Subbasin, and surface water is the source for the remainder (35%). Groundwater also met the demand for municipal and rural residential users. The volume of groundwater and surface water used on an annual basis within the Subbasin is summarized directly from measured and reported groundwater pumping and surface water diversions when available; however, a water budget approach has been used to estimate the remaining unmeasured volume of groundwater extraction. **Table ES-2** provides a summary of water use by water sector. Numbers are rounded to the nearest 100 except for totals which are rounded to the nearest 1,000.

Table ES-2. Total Water Use by Water Use Sector				
Sector	WY 2023 (AF)			
	Groundwater	Surface Water	Total	Total Irrigated Area (acres)
Agricultural	17,000	9,000	**26,000**	**8,000**
Municipal	400	0	**400**	**0**
Rural Residential	300	0	**300**	**0**
Total	**18,000**	**9,000**	**27,000**	**8,000**

GSP Implementation Progress

Since the previous Annual Report (Tehama County GSA, 2023), the Tehama County GSA coordinated with stakeholders to seek funding through DWR's Sustainable Groundwater Management Grant (SGM) Program for projects and management actions (PMAs) previously identified in the GSP. DWR has been awarded a grant of approximately 1.5 million dollars for the Antelope Subbasin in September 2023. Additionally, several actions by the Tehama County GSA continue to fulfill GSP requirements, such as monitoring groundwater levels and quality, updating the Data Management System (DMS), and annual reporting to DWR.

Also, since the release of the previous Annual Report, DWR issued an "incomplete" determination and provided corrective actions to the Antelope Subbasin GSP. The Tehama County GSA acknowledges and is addressing the two deficiencies listed in the DWR's **GSP determination letter** (https://sgma.water.ca.gov/portal/service/gspdocument/download/9947):

1) Providing more detailed explanation and justification regarding the selection of the sustainable management criteria for groundwater levels, particularly undesirable results, and minimum thresholds, and quantitatively describe the effects of those criteria on the interests of beneficial uses and users of groundwater.

2) The GSA must provide more detailed explanation and justification regarding the selection of sustainable management criteria for degraded groundwater quality, particularly the selection and exclusion of constituents of concern for monitoring and sustainable management.

In 2023, the Tehama County GSA in the Subbasin prepared to implement future projects to address recommended corrective actions, which will largely be funded by the SGM Implementation Grant Program. The ongoing implementation of PMAs, outlined in **Section 5**, aims to address these corrective actions effectively through the Periodic Evaluation of the GSP, which is due in January 2027.

1 GENERAL INFORMATION §356.2(A)

The Annual Report for the Antelope Subbasin (Subbasin) (5-021.54) was prepared on behalf of the Tehama Flood Control and Water Conservation District (Tehama County GSA) to fulfill the statutory requirements of the Sustainable Groundwater Management Act (SGMA) legislation (§10728) and regulatory requirements developed by the California Department of Water Resources (DWR) included in the Groundwater Sustainability Plan (GSP) regulations (§354.40 and §356.2). The regulations require the Groundwater Sustainability Agencies (GSAs) to submit an Annual Report to DWR by April 1st following the reporting year, which spans the water year (WY) from October 1st to September 30th. This Annual Report is the third Annual Report submitted on behalf of the Subbasin and includes data for the most recent WY 2023. Public seeking information on Antelope Subbasin and GSP Implementation, Technical Advisory Committee meeting schedules and recordings, and other resources should visit the **Tehama County GSA** (https://tehamacountywater.org/gsa/).

1.1 Report Contents

This report is the third Annual Report prepared for the Antelope Subbasin GSP submitted in January 2022. The first Annual Report included data elements for the first reporting year, WY 2021, as well as a "bridge year," WY 2020. The second and third Annual Reports contain data only for the current reporting year, WY 2022 and WY 2023, respectively. Data elements presented in this report refer to WY 2023, the 12-month period spanning October 2022 through September 2023 unless otherwise noted. Pursuant to GSP regulations, the Annual Report includes:

- Groundwater Elevation Data
- Water Supply and Use
- Change in Groundwater Storage
- GSP Implementation Progress

1.2 Subbasin Setting

The Subbasin is a 30 square mile (19,100 acre) area on the eastern side of Tehama County. The Subbasin is managed by the Tehama County GSA.

The Subbasin is shown in **Figure 1-1** and **Figure 1-2**. The Subbasin lies in the northeastern portion of the Sacramento Groundwater Basin, **Figure 1-1**. The Subbasin's northern boundary is the Bend Subbasin, the western and southern boundary is the Sacramento River and the Red Bluff Subbasin, and the eastern boundary is Antelope Creek and the Los Molinos Subbasin (DWR, 2018), **Figure 1-2**. Several surface water features are located in the Subbasin, including the East Sand Slough and Salt Creek. Smaller local streams entering and traversing the Subbasin include Millrace Creek, New Creek, and Craig Creek. Groundwater generally flows from northeast to southwest.

The Antelope GSP estimates the sustainable yield of the Subbasin to be 18,000 acre-feet (AF) based on historical groundwater pumping averages of 13,000 acre-feet per year AFY and an annual decrease in storage of 9,130 AFY (Tehama County FCWCD, 2021). Water use in the Subbasin is dominated (96%) by agricultural uses. Municipal and household water use accounts for 4% of water used. Groundwater constitutes the majority (67%) of the Subbasin's water supplies, with surface water comprising the remaining portion (33%).

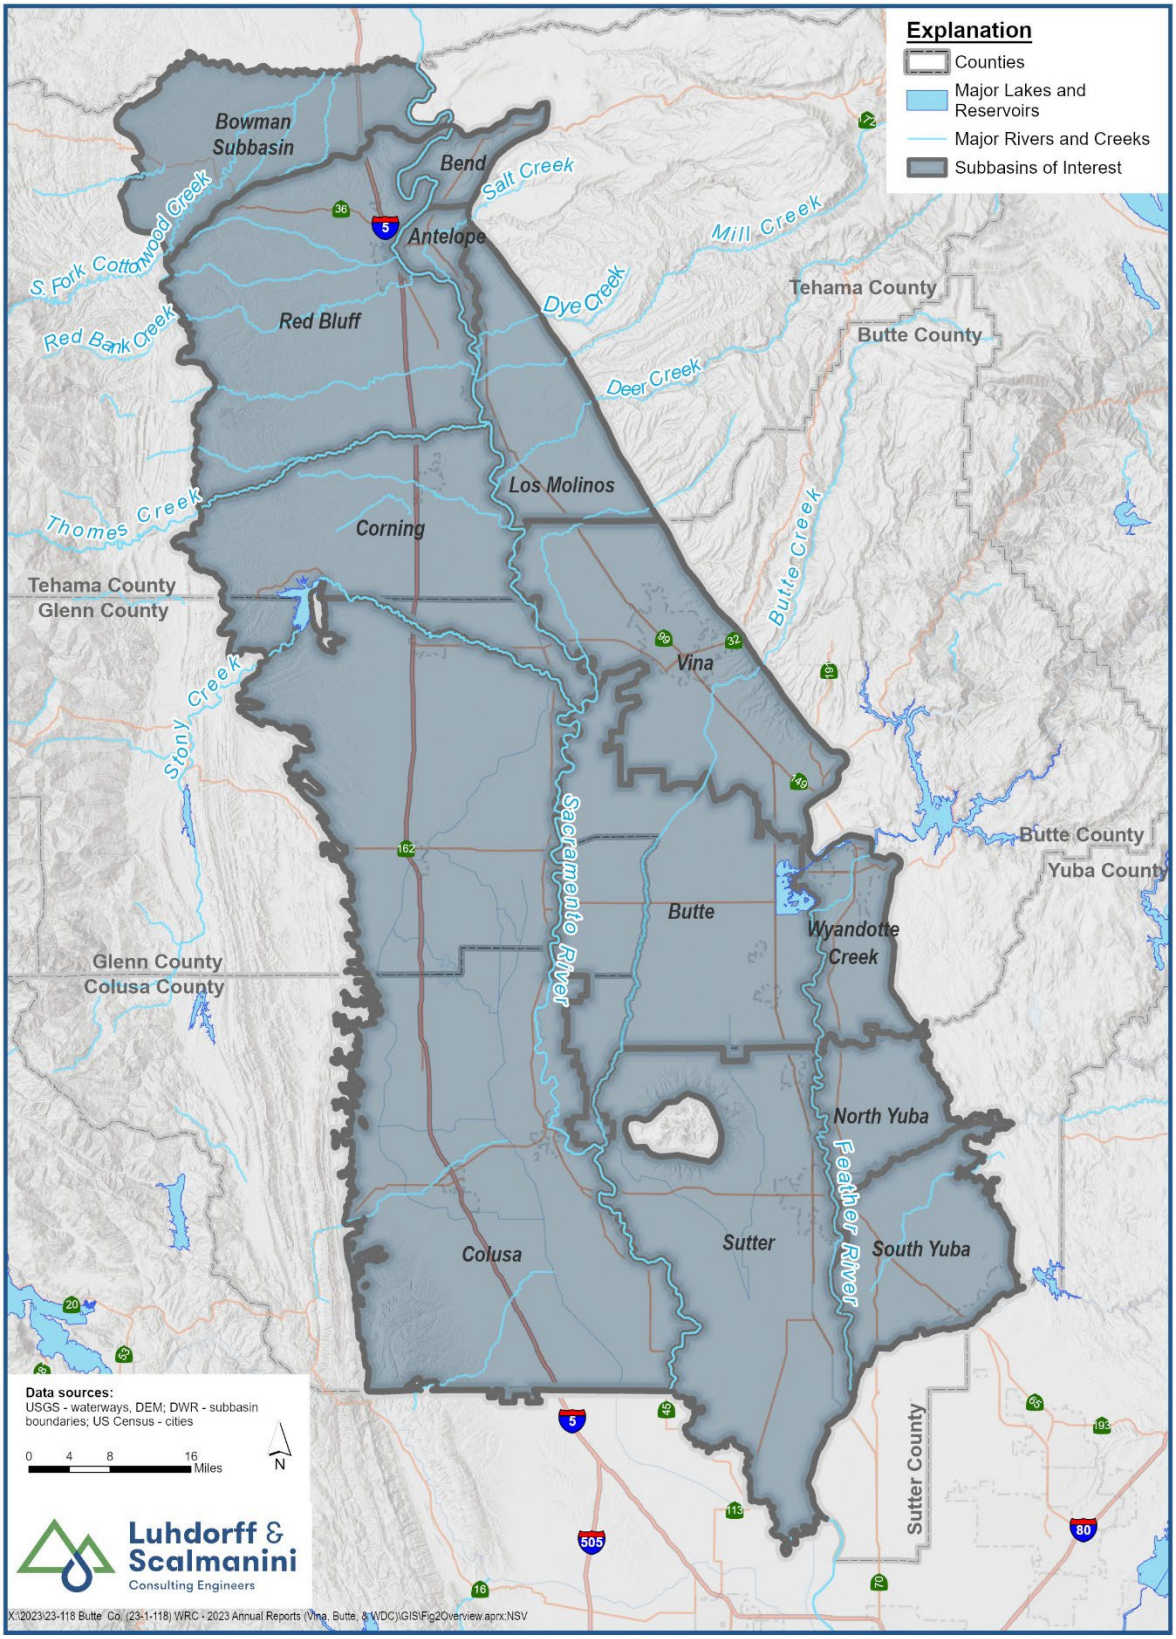


Figure 1-1. Subbasins in the North Sacramento Valley

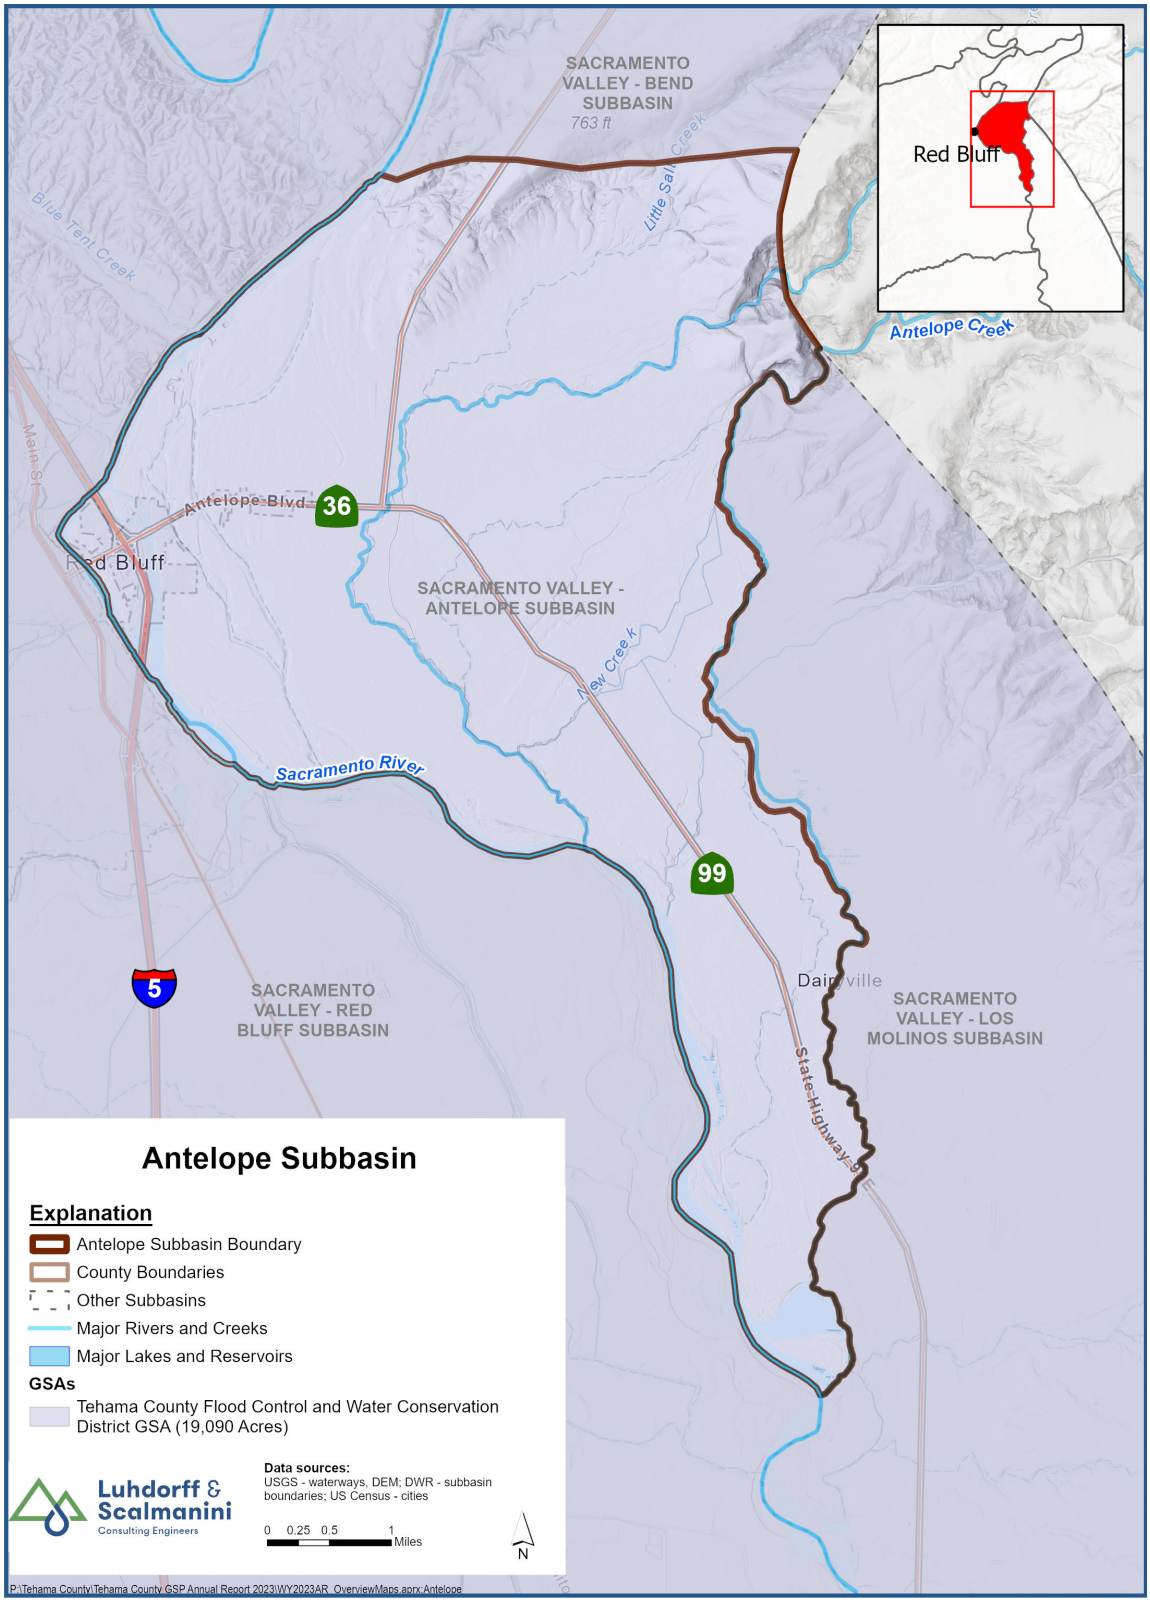


Figure 1-2. Antelope Subbasin and Groundwater Sustainability Agency Boundaries

2 GROUNDWATER ELEVATIONS §356.2(B)(1)

Groundwater elevations in the Subbasin typically fluctuate seasonally between and within water years, particularly in groundwater-dependent areas or during drought years when groundwater is used to compensate for diminished surface water supplies. Seasonal fluctuations of groundwater levels occur in response to groundwater pumping and recovery, land and water use activities, recharge, and natural discharge. Sources of recharge into the groundwater system include precipitation, applied irrigation water, and seepage from local creeks and rivers.

Groundwater pumping for irrigation typically occurs from April to September, although depending on the timing of rainfall, it may shift earlier and or later into the season. Consequently, groundwater levels are usually highest in the spring and lowest during the irrigation season in the summer months. Fall groundwater measurements (typically measured in October) indicate groundwater conditions after the primary irrigation season.

Groundwater levels in the Subbasin are monitored in representative monitoring site (RMS) wells that were selected in the GSP to represent localized groundwater conditions for specified areas of the Subbasin. RMS wells include a mixture of domestic wells, irrigation wells, and dedicated observation wells. In total, there are five (5) RMS wells used to monitor conditions in the Upper and Lower Aquifer. **Appendix A** contains hydrographs showing groundwater elevations and the approximate locations of the RMS wells. Sustainable Management Criteria (SMC), as described in **Appendix B**, are assigned to groundwater levels at the RMS wells.

Certain RMS wells measured by DWR and Tehama County are equipped with data loggers and pressure transducers, which continuously monitor and record hourly changes in groundwater levels. These and the remaining wells in the network are measured by hand at least two times each year in March, and October. Data from groundwater level monitoring wells is available from DWR's online SGMA Data Viewer tool (https://sgma.water.ca.gov/webgis/?appid=SGMADataViewer).

Spring and Fall 2023 groundwater elevation measurements for RMS wells in the Upper Aquifer systems are summarized in **Table 5-2**. DWR and Tehama County collect groundwater elevation data in the Subbasin, which is publicly available from DWR's online SGMA Data Viewer tool (https://sgma.water.ca.gov/webgis/?appid=SGMADataViewer). The groundwater level monitoring methods are consistent with the protocols described in the Antelope GSP. Depending on the well, groundwater elevations are measured using steel tape, electric sounder, or pressure transducers. The accuracy of groundwater level measurements is typically either 0.01 feet or 0.1 feet, depending on the equipment used.

The following sub-sections provide a summary of groundwater elevations and conditions during WY 2023 through the presentation and description of groundwater elevation contours (**Section 2.1**) and hydrographs of groundwater elevations (**Section 2.2; Appendix A**).

2.1 Groundwater Elevation Contour Maps – §356.2(b)(1)(A)

Groundwater elevation contour maps for Spring and Fall 2023 were prepared for the Upper Aquifer, as shown in **Figures 2-1** and **2-2**. Spring contours are intended to generally represent seasonal high groundwater elevations (shallower depth to water), and fall contours are intended to generally represent seasonal low groundwater elevations (deeper depth to water). Groundwater elevation contours were developed by creating a continuous groundwater elevation surface based on available monitoring well data using the kriging interpolation method. Questionable groundwater elevation measurements were excluded, and minor adjustments to the contours were made based on professional judgment.

The contour maps of the Upper Aquifer (**Figures 2-1 and 2-2**) each show that groundwater elevations are generally higher in the northern and eastern areas of the Subbasin versus the southern and western areas, indicating a general gradient – and thus groundwater flow – from the northeast to the southwest. The contour maps illustrate several general features of the groundwater flow system in the Antelope Subbasin, including:

- Overall, northeast to southwest groundwater flow is consistent with recharge from the Sierra Nevada Range.
- Movement of water towards the Sacrament River in both the fall and the spring.
- The higher concentration of contours in the central portion of the Subbasin indicates a steeper gradient and could suggest higher groundwater flow. Nonetheless, the contours are consistent with the current understanding of recharge coming from the Sierra Nevada foothills. New sources of information and data may improve understanding of this area.

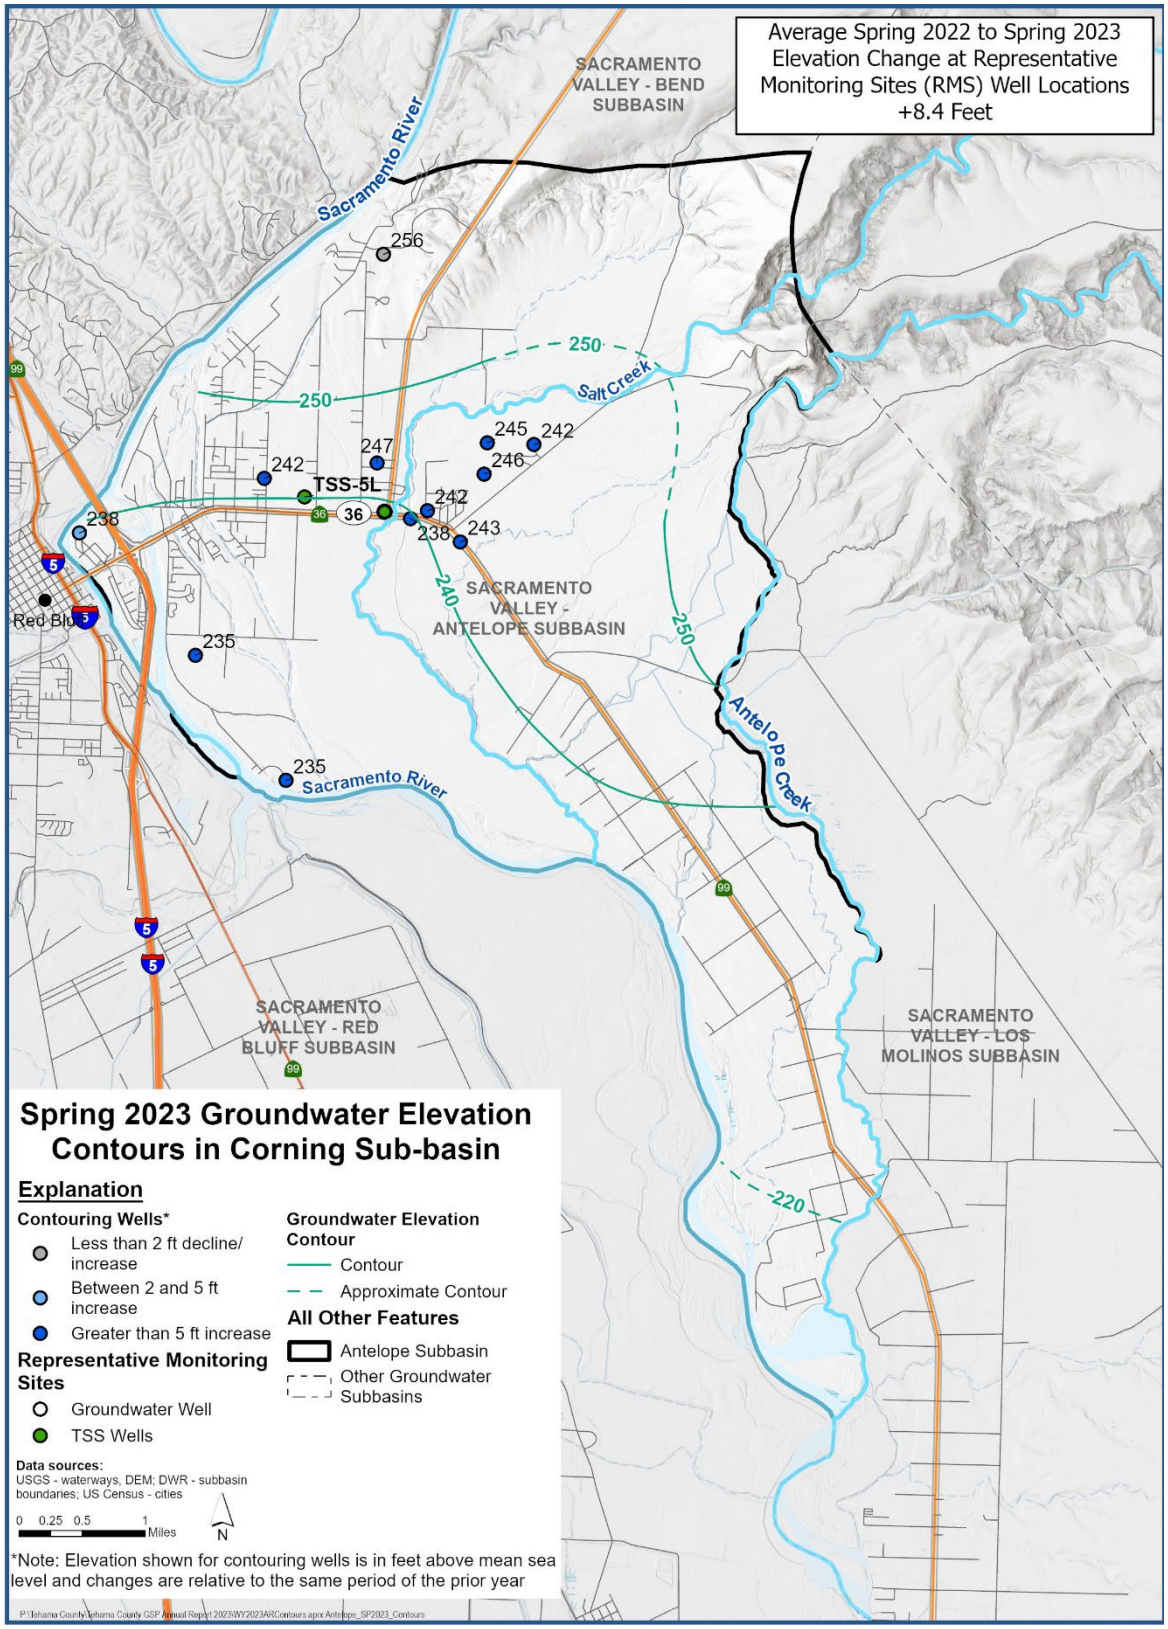


Figure 2-1. Subbasin Contours of Equal Groundwater Elevation for the Upper Aquifer, Spring 2023 (Seasonal High)

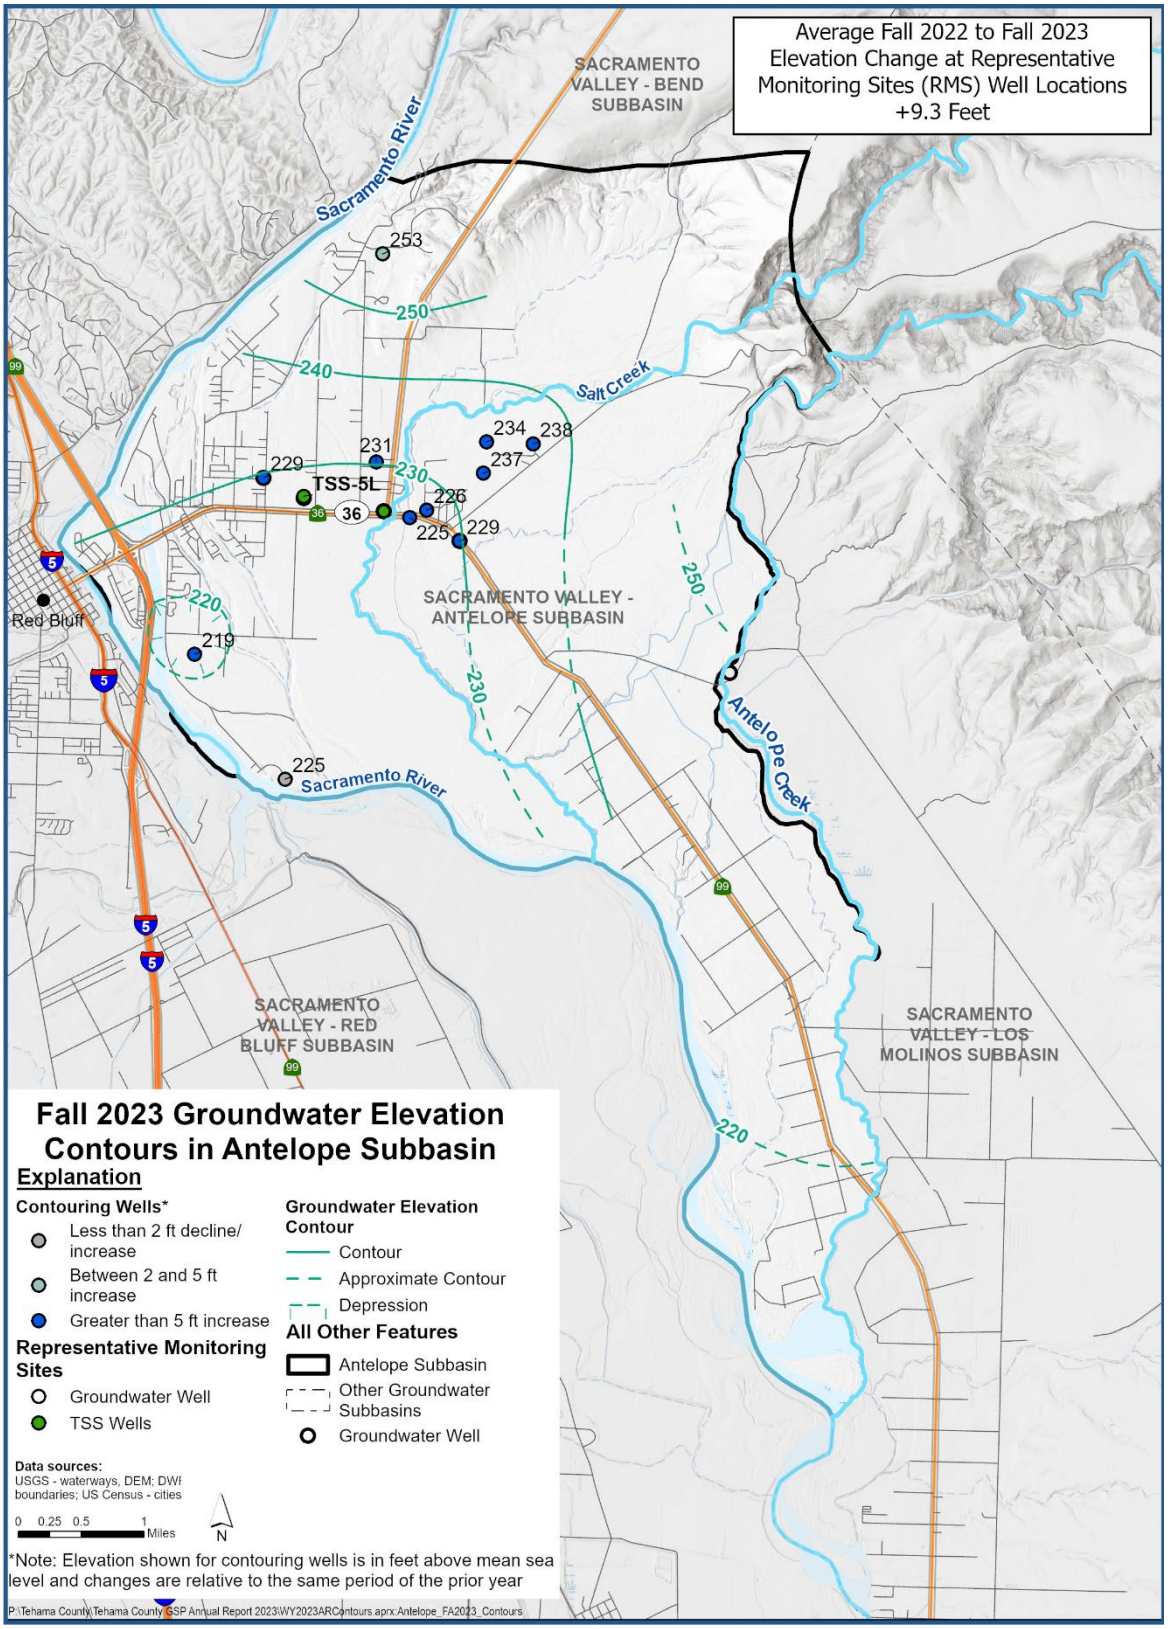


Figure 2-2. Subbasin Contours of Equal Groundwater Elevation for the Upper Aquifer, Fall 2023 (Seasonal Low)

2.2 Hydrographs of Groundwater Elevations – §356.2(b)(1)(B)

Groundwater elevation hydrographs for each RMS well are presented in **Appendix A**. **Appendix B** explains the SMC terminology defined in Section 6 of the GSP (e.g., Minimum Threshold [MT], Measurable Objective [MO], Interim Milestone [IM]). **Table 5-1** summarizes the MOs, MTs, and identification of undesirable results for WY 2023, and **Table 5-2** contains a summary of the Spring 2023 (Seasonal High) and Fall 2023 (Seasonal Low) groundwater elevations measured at each well. **Table 5-2** also summarizes the established MO and MT for groundwater elevations, the changes in groundwater elevations from WY 2022 to WY 2023, and the differences between the 2023 groundwater elevations and the MO.

Historically, groundwater levels have typically remained at or above their respective MOs in the Subbasin. The GSP also established IMs to provide numerical metrics for GSAs to track the Subbasin's conditions relative to the overall sustainability goal, ensuring that the groundwater management of the Subbasin remains sustainable.

Spring and Fall 2023 groundwater elevations were generally near seasonal groundwater elevations in previous years. In WY 2023, the average seasonal high was 244 feet above mean sea level (AMSL), and the average seasonal low was 225 feet AMSL. In WY 2021, the average seasonal high was 239 feet AMSL, and in WY 2022, the average seasonal high was 236 feet AMSL. Increases in groundwater levels are generally expected to result from decreased groundwater extraction in WY 2023 relative to WY 2022, as well as increased recharge due to wet climate conditions.

All wells remained above the MO in Spring 2023, except for Ant 1U and Ant 2U in Fall 2023, which were below the MO by about two feet. All measured groundwater elevations remained above the corresponding MT of that RMS well, avoiding undesirable results related to groundwater levels as defined in the GSP. On average, groundwater levels in RMS wells were roughly 54 feet higher than MT elevations in Spring 2023 and 41 feet higher than MT elevations in Fall 2023. All measured groundwater levels remained within the Subbasin's margin of operational flexibility and above the MTs.

3 WATER SUPPLY AND USE

As required by §356.2, this section summarizes water supply and use in the Subbasin, categorized by groundwater extraction volumes, surface water supply, and total supply. The total water available for use in the Subbasin was tabulated from groundwater extraction volumes reported in **Table 3-1** and the surface water supply reported in **Table 3-2**. The total water available is summarized in **Table 3-3** for WY 2023. Groundwater extraction volumes are either based on measured data or are estimates from a water use analysis based on 2023 land use data and climate conditions. The water use analysis methodology is discussed in **Appendix E**. Surface water use was estimated from historic deliveries when records were not available.

Table 3-1. Groundwater Use by Water Use Sector	
Sector	**WY 2023 (AF)**
Agricultural	17,000
Municipal	400
Rural Residential	300
Total	**18,000**

3.1 Groundwater Extraction – §356.2(b)(2)

Groundwater extraction in the Subbasin is summarized in **Table 3-1**. Groundwater extraction is reported from pumping records where available, and the remaining groundwater extraction is estimated through the water use analysis approach described in the previous section and in **Appendix E**.

The majority of the Subbasin relies on groundwater supplies for agricultural irrigation. In years characterized by drought and low precipitation, diminished surface water supplies lead to increased extraction and reduced recharge, causing a decline in groundwater storage. Contrastingly, in wet years, such as WY 2023, wet climate conditions help to increase and bolster groundwater storage.

Municipal water users extracted approximately 400 AF in the Subbasin in WY 2023. Municipal water supplies are measured and provided by the City of Red Bluff and Los Molinos Mutual Water Company. Fourteen percent of the City of Red Bluff lies within the Subbasin; the remainder is in the neighboring Red Bluff Subbasin; water use data was allocated between the Subbasin based on spatial distribution. The record of municipal supplies does not distinguish between urban and industrial water uses.

Rural residential water users rely on private domestic wells to meet their household water needs. Rural residential groundwater extraction was quantified based on average per capita water use and estimated population. The average per capita water use reported in the City of Red Bluff's 2020 Urban Water Management Plan (UWMP) 2020 water use (City of Red Bluff, 2020) is considered to be representative of the area. Water use in 2020 was 253 gallons per capita per day. Parcels were chosen within the Subbasin, except for those in municipal service areas. Residential parcels were selected based on Tehama County general plan zoning codes. Population estimates were derived from these zoning codes and average household sizes from the US census. The resulting population estimate was used to estimate residential groundwater pumping.

The total estimated groundwater extraction was approximately 18,000 AF in WY 2023, the majority of which was used to meet agricultural water demands (approximately 17,000 AF). The total groundwater extraction is about 2,000 AF more than the historical groundwater pumping average (16,000,000 AFY; **Table 4-1**) and higher than 12,000 AF, which was the average annual extraction of the last four wet WYs on record (2006, 2011, 2017, and 2019). The decrease in groundwater extraction in WY 2023 (18,000 AFY) compared to WY 2022 (26,130 AFY) is attributed to increased precipitation in WY 2023, where increased precipitation was able to meet evapotranspiration demands. **Figure 3-1** shows the general areas where groundwater is applied in the Subbasin. About 94% of the total groundwater extraction was used by the agricultural sector, while the remaining 6% was used for municipal and rural residential water needs.

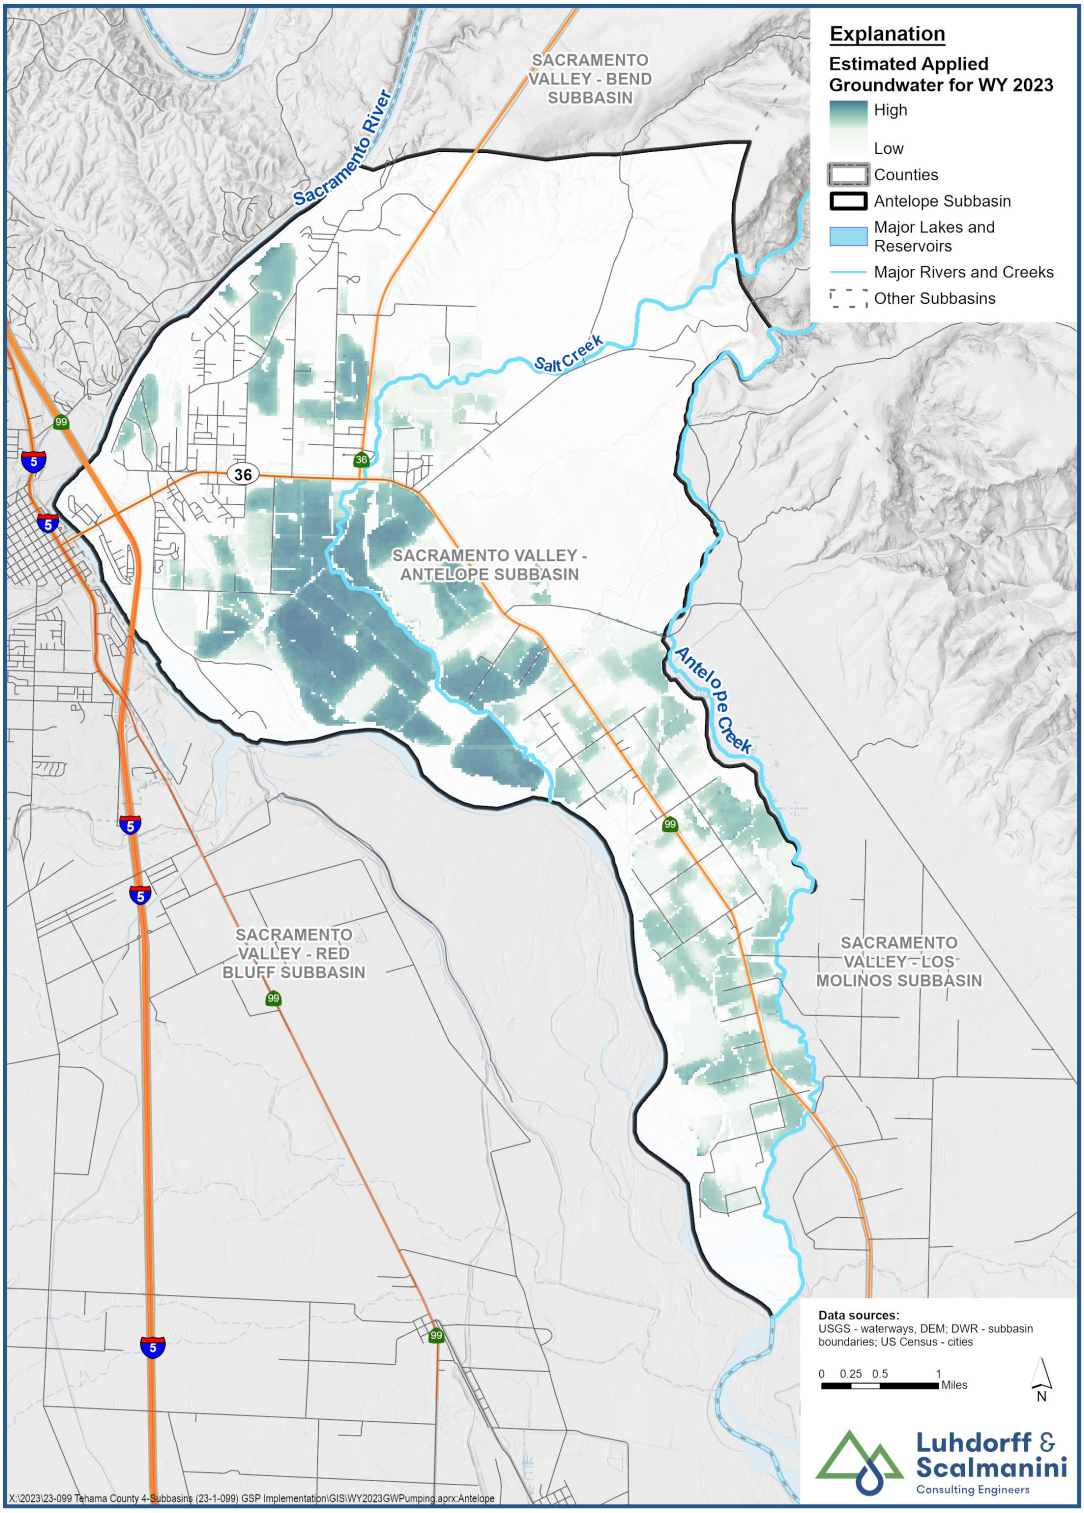


Figure 3-1. Estimated Applied Groundwater – WY 2023

3.2 Surface Water Supply – §356.2(b)(3)

Surface water supplies used or available for use in the Subbasin are summarized in **Table 3-2.** Surface water supplies are reported directly from water supplier records or collected from publicly available sources (water rights diversion records, etc.) where available. Missing surface water supply data was estimated based on available historical diversions data in similar water years.

Surface water provided about 35% of the agricultural water demand in the Subbasin for WY 2023. Diversions from surface water features such as Antelope Creek were accessed from the State Water Resource Control Board's (SWRCB) Electronic Water Rights Information Management System (eWRIMS; SWRCB, 2023a). Data from eWRIMS on surface water delivery indicated which water rights holders in the Subbasin had made diversions during WY 2023. There are currently no surface water supplies for municipal use in the Antelope Subbasin. Total surface water diversions and deliveries for the Antelope Subbasin are estimated to be about 10,400 AF and 9,000 AF, respectively.

In contrast with curtailments and reduced surface water supplies experienced in WY 2022, WY 2023 was a Wet WY. Despite wet conditions in WY 2023, surface water use decreased slightly from WY 2023 compared to WY 2022.

Table 3-2. Surface Water Use by Water Use Sector for WY 2023

Sector	Diverted (AF)	Applied (AF)
Agricultural	10,400	9,000
Total	**10,400**	**9,000**

3.3 Total Water Use by Sector – §356.2(b)(4)

Groundwater supplied approximately 65% of the agricultural water demand in the Subbasin in WY 2023. Surface water supplied approximately 35% of the agricultural water demand in the Subbasin in WY 2023. The total water available for use in the Subbasin was tabulated from groundwater extraction volumes reported in **Table 3-1** and the surface water supply reported in **Table 3-2**. The total water available is summarized in **Table 3-3** for WY 2023. The results are either based on measured data or estimates, as described in the previous two sections.

Table 3-3. Total Water Use by Water Use Sector

Sector	WY 2023 (AF)			
	Groundwater	Surface Water	Total	Total Irrigated Area (acres)
Agricultural	17,000	9,000	**26,000**	**8,000**
Municipal	400	0	**400**	**0**
Rural Residential	300	0	**300**	**0**
Total	**18,000**	**9,000**	**27,000**	**8,000**

3.4 Uncertainties in Water Use Estimates

Estimated uncertainties in the water budget components are presented in **Table 3-4**. The uncertainty of these water budget components is based on typical accuracies given in technical literature and the cumulative estimated accuracy of all inputs used to calculate the components.

Table 3-4. Estimated Uncertainty in Water Use Estimates

Water Budget Component	Data Source	Estimated Uncertainty (%)	Source
Groundwater Water			
Agricultural	Measurement	20%	Typical uncertainty from water balance calculation.
Municipal/Industrial	Measurement /Estimate	5%	Typical accuracy of municipal water system reporting.
Rural Residential	Calculation	15%	Estimated from per capita water use and Census information.
Surface Water			
Agricultural	Calculation	10%[1]	Estimated from Senate Bill 88 measurement accuracy standards.

[1] *Higher uncertainty of 10-20% is typical for estimated surface water inflows, including un-gaged inflows from small watersheds into creeks that enter the Basin.*

4 GROUNDWATER STORAGE

Long-term fluctuations in groundwater levels and groundwater in storage occur when there is an imbalance between the volume of water recharged into the aquifer and the volume of water removed from the aquifer, either by extraction or natural discharge to surface water bodies. If, over a period of years, the amount of water recharged to the aquifer exceeds the amount of water removed from the aquifer, then groundwater levels will increase and groundwater storage increases (i.e., positive change in storage). Conversely, if, over time, the amount of water removed from the aquifer exceeds the amount of water recharged, then groundwater levels decline, and groundwater storage decreases. These long-term changes can be linked to various factors, including increased or decreased groundwater extraction or variations in recharge associated with wet or dry hydrologic cycles.

A review of the RMS well hydrographs (**Appendix A**) indicates that groundwater elevations are either relatively stable or showing a declining trend over time. Declines may be influenced by the significant percentage of water years since 2006 that have been dry (i.e., characterized as Below Normal, Dry, or Critical). Since groundwater storage is closely related to groundwater levels, measured changes in groundwater levels can serve as a proxy for and be utilized to estimate changes in groundwater storage. Changes in groundwater storage in the Subbasin follow a pattern typically seen in the majority of the Sacramento Valley. During normal to wet years, groundwater is withdrawn during the summer for irrigation and replenished during the winter through recharge of precipitation and surface water inflows, allowing groundwater storage to potentially rebound by the following spring. During dry years and

drought conditions, this pattern is disrupted when more groundwater may be pumped to meet irrigation demand, and less recharge may occur due to reduced precipitation, diminished or curtailed surface water supplies, and lower stream levels.

In WY 2023, a Wet WY, cumulative (Upper and Lower Aquifer) groundwater storage increased by approximately 8,000 AF. Decreased groundwater extraction in WY 2023 relative to WY 2022 contributed to the increase in groundwater storage, as well as increased recharge due to wet climate conditions. These and related factors, such as flood irrigation with surface water and increased stream flows, resulted in higher groundwater levels in Spring 2023 compared to Spring 2022.

The following sections present a summary of groundwater use and change in storage over time, along with a description of the uncertainty in storage change estimates.

4.1 Change in Groundwater Storage – §356.2(b)(5)(B)

Annual groundwater pumping, groundwater storage changes, and the cumulative change in storage over time are presented for WY 1990 through WY 2023 in **Table 4-1** and **Figure 4-1**. In contrast to WY 2022, WY 2023 was a Wet WY and saw a marked increase in groundwater storage, totaling approximately 8,000 AF in the Upper and Lower Aquifer. For context, in the past 33 years, the largest decrease in groundwater storage is estimated to be -15,000 AF, and the highest increase was estimated to be 12,000 AF.

The Tehama Integrated Hydrogeologic Model (TIHM) was used to estimate groundwater pumping, groundwater uptake, change in storage, and cumulative change in storage for WY 1990 through WY 2019 (Tehama County GSA, 2022).

It should be noted that the groundwater model was not used to estimate storage changes for WY 2020 through WY 2023. Therefore, future updates to the model may result in different estimates for WY 2020 through WY 2023 groundwater storage changes. The approach of using measured groundwater elevation changes to estimate storage changes is considered reasonable and cost-effective for the purposes of the Annual Report. **Table 4-1** includes estimates of annual groundwater pumping, annual storage change, and cumulative storage change for WYs 1990-2023. Estimates of annual groundwater pumping for WYs 2022-2023 are described in **Section 3** and **Appendix E.** Change in annual storage and cumulative change in storage for WYs 2021-2023 was estimated based on the methods described in **Section 4.2** Groundwater extraction methods for the entire period, include pumping for agricultural, municipal, and rural residential purposes.

The annual and cumulative changes in groundwater storage are both calculated for the period from WY 2020 through WY 2023 based on the methodology described in Section 4.2. This methodology differs from the methodology reported in the GSP; however, it is anticipated that the methodology described in **Section 4.2** will be utilized for future Annual Reports.

Table 4-1. Annual Groundwater Extraction and Change in Storage			
Water Year (Hydrologic Year Type)	Groundwater Extraction[1] (AF)	Annual Change in Storage (AF)	Cumulative Change in Storage (AF)
1990 (C)	15,000	-7,200	-7,200
1991 (C)	14,620	-5,900	-13,000
1992 (C)	15,550	-4,100	-17,000
1993 (AN)	11,870	8,000	-9,200
1994 (C)	14,620	-4,800	-14,000
1995 (W)	12,900	12,000	-2,000
1996 (W)	13,900	2,600	600
1997 (W)	14,100	-600	0
1998 (W)	11,600	11,000	11,000
1999 (W)	14,600	-4,000	7,000
2000 (AN)	12,800	-880	6,100
2001 (D)	14,800	-7,500	-1,400
2002 (D)	15,300	-3,700	-5,100
2003 (AN)	13,800	3,700	-1,400
2004 (BN)	16,200	81	-1,300
2005 (AN)	11,600	780	-520
2006 (W)	13,200	7,600	7,100
2007 (D)	14,600	-9,100	-2,000
2008 (C)	17,920	-8,100	-10,000
2009 (D)	14,670	-3,700	-14,000
2010 (BN)	11,700	2,600	-11,000
2011 (W)	10,880	6,800	-4,400
2012 (BN)	14,740	-7,100	-12,000
2013 (D)	16,680	-2,000	-14,000
2014 (C)	17,560	-7,300	-21,000
2015 (C)[2]	21,490	-4,800	-26,000
2016 (BN)	15,570	4,400	-21,000
2017 (W)	16,200	9,600	-12,000
2018 (BN)	18,600	-6,300	-18,000
2019 (W)	13,920	7,700	-10,000
2020 (D)	21,590	-8,000	-18,000

Table 4-1. Annual Groundwater Extraction and Change in Storage			
Water Year (Hydrologic Year Type)	**Groundwater Extraction[1] (AF)**	**Annual Change in Storage (AF)**	**Cumulative Change in Storage (AF)**
2021 (C)[2]	27,460	-15,000	-33,000
2022 (C)[2]	26,300	-5,000	-38,000
2023 (W)	18,000	8,000	-30,000
Historic Averages (2000-2022)[3]			
2000-2022 (22 years)	16,000	-1,000	-9,000
W (9 years)	13,000	6,000	-300
AN (4 years)	13,000	3,000	-1,000
BN (5 years)	15,000	-1,000	-13,000
D (6 years)	16,000	-6,000	-9,000
C (9 years)	19,000	-7,000	-20,000

Notes:

Positive values indicate inflows to the groundwater system, and negative values indicate outflows from the groundwater system.

GW = Groundwater

Water Year Types Classified According to the Sacramento Valley Water Year Index: AN = Above Normal, BN = Below Normal, C = Critical; D = Dry, W = Wet

[1] *Groundwater extraction and storage for WY 1990 through WY 2019 are from the Tehama Integrated Hydrologic Model (TIHM), groundwater extraction values for WY 2020 through WY 2023 are described in **Section 3** and **Appendix E**. Annual change in storage values for WY 2020 through WY 2023 were estimated using the method described in **Section 4**.*

[2] *Indicated cutback year with reduced surface water supply availability.*

[3] *The historical average calculation covers the period from 2000 to 2022, excluding the current water year.*

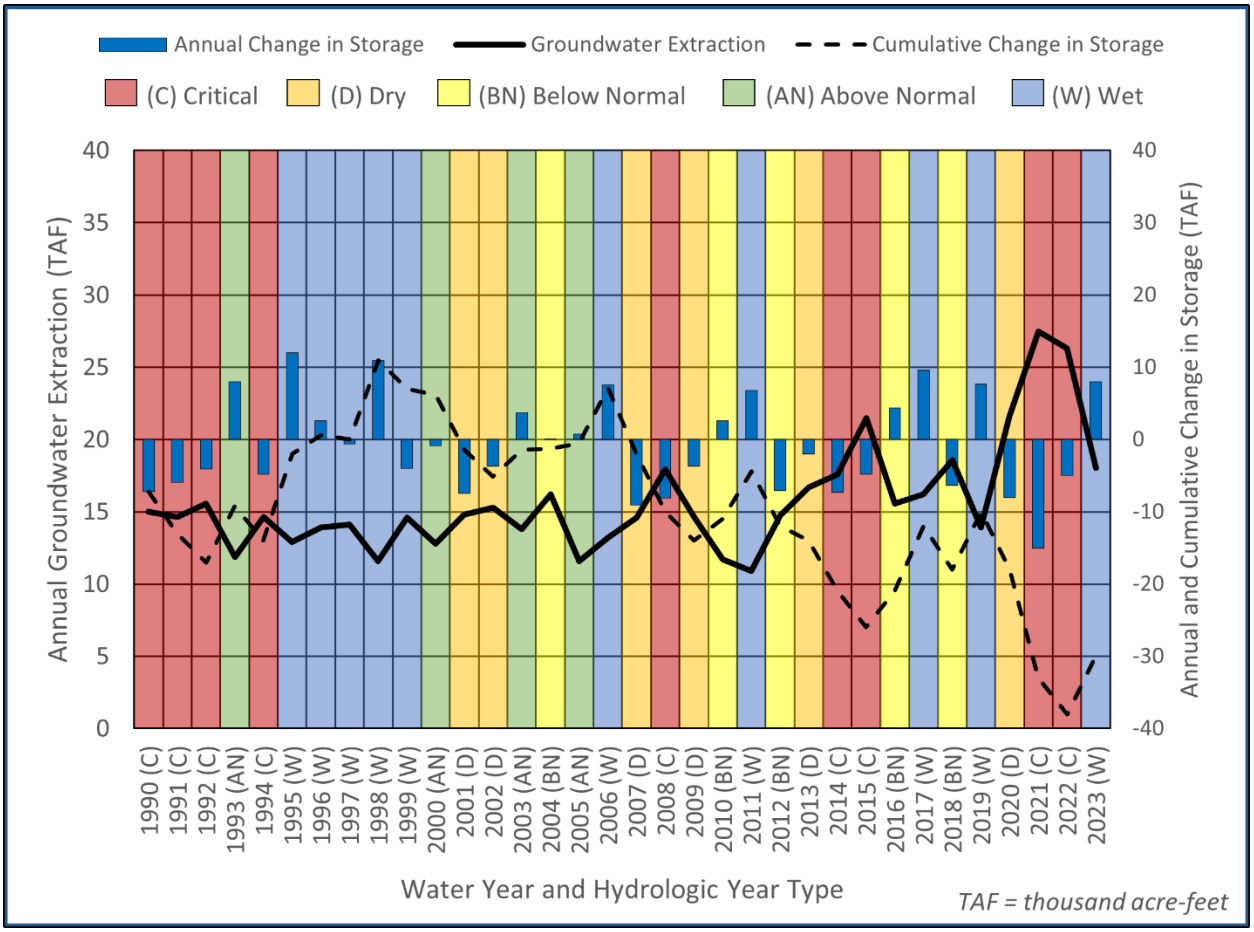


Figure 4-1. Groundwater Extraction and Change in Groundwater Storage from WY 1990 to WY 2023

4.2 Groundwater Storage Maps – §356.2(b)(5)(A)

The spatial distribution of estimated changes in groundwater storage in the Upper Aquifer for the period from Spring 2022 to Spring 2023 are shown in **Figure 4-2.** Since groundwater storage is closely related to groundwater levels, measured changes in groundwater levels can serve as a proxy for and be utilized to estimate changes in groundwater storage. Change in groundwater storage was estimated based on change in measured spring-to-spring groundwater levels at each RMS well. Change of groundwater levels from Spring 2022 to Spring 2023 at measured wells screened in the Upper Aquifer were interpolated to estimate the groundwater elevation change in areas where sufficient data was available. The estimated elevation change was multiplied by a spatially variable aquifer storage coefficient (0.0115 - 0.062) available from the TIHM (Tehama County GSA, 2022) to estimate the groundwater storage change volume in the Upper Aquifer. The spatial extent of this estimate was limited to areas where measured groundwater levels were available (**Figure 4-1**). Therefore, an area-weighted adjustment was applied to the estimated storage to estimate the Subbasin-wide change in storage.

Sufficient groundwater level data were not available to interpolate water level changes in the Lower Aquifer. Therefore, Lower Aquifer storage change was estimated using the Upper Aquifer storage change

and the historical ratio of storage changes in the two aquifers for critical years. The summation of the changes in the Upper and Lower Aquifers provides the total groundwater storage change in the Subbasin.

Negative changes in storage values indicate lowering groundwater levels and depletion of groundwater storage, whereas positive changes in storage values represent rising groundwater levels and accretion of groundwater in storage. As shown in **Figure 4-2**, the change in storage within the Upper Aquifer from Spring 2022 to Spring 2023 was between 0.109 and 0.339 AF per acre. The central portion of the Subbasin experienced a larger positive change in storage, while the surrounding portions of the subbasin experienced a lower positive change in storage. Total groundwater storage change in the Upper Aquifer was estimated to be approximately 5,000 AF between Spring 2022 and Spring 2023. Total groundwater storage change in the Lower Aquifer was estimated to be approximately 3,000 AF between Spring 2022 and Spring 2023.

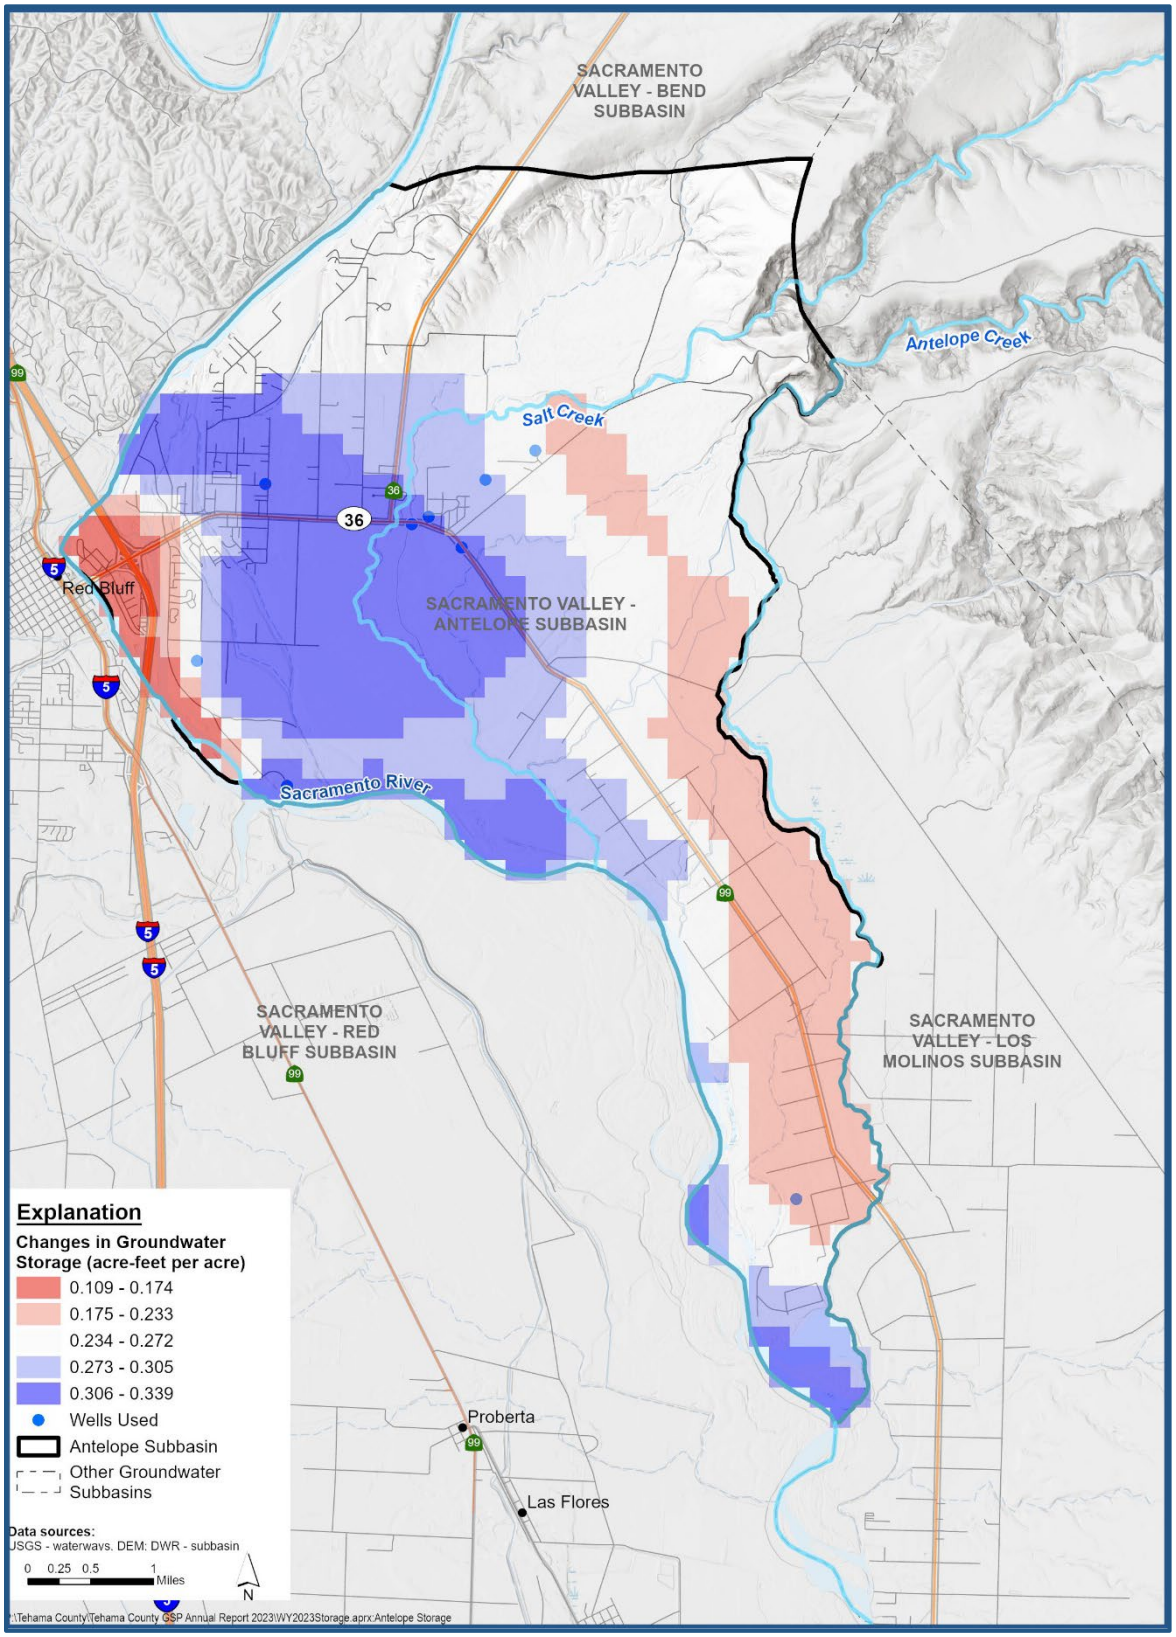


Figure 4-2. Change in Groundwater Storage from Spring 2022 to Spring 2023 in the Upper Aquifer

4.3 Uncertainty in Groundwater Storage Estimates

The uncertainty associated with the change in groundwater storage estimates depends in part on the underlying uncertainty of the groundwater level data, the representative area, and the calibrated storage coefficient parameter used to calculate the change in groundwater storage. As described in **Section 4.2**, the calibrated storage coefficient (0.0115 - 0.062) from the TIHM was used to calculate the change in storage for this WY. Based on a comparison of storage change estimates from the TIHM for similar water year types, the calculated storage change is reasonable. Thus, the uncertainty of the estimated change in groundwater storage is typically 20-30% for integrated hydrologic models. Therefore, the approach described in **Section 4.2** is considered to have similar uncertainty.

5 GSP IMPLEMENTATION PROGRESS – §356.2(B)(5)(C)

5.1 Main Activities of Water Year 2023

The main activities and updates since the previous Annual Report are as follows:

- The Tehama County GSA completed the WY 2023 Annual Report and other critical tasks.
- The Tehama County GSA coordinated a proposal seeking funding through DWR's SGM Grant Program. Coordination efforts included planning and refinement PMAs, evaluating and ranking PMAs, and preparing and submitting the grant application. The grant application was submitted in December 2022, and DWR released a final award list in September 2023; results are summarized below in **Table 5-4**.
- An airborne electromagnetic (AEM) survey by DWR took place in the summer of 2022. The data collected provides a better understanding of aquifer characteristics and will help support future efforts to refine the current hydrogeologic conceptual model. Data is available at: https://data.cnra.ca.gov/dataset/aem.
- All sustainability indicators (SIs) are above their MTs (see summary **Table 5-1**).
- Progress has been made on 2 PMAs since the last Annual Report (**Table 5-4; Section 5.3**).

Several other actions continue in the Subbasin to fulfill the requirements of the GSP. These include:

- Monitoring and recording groundwater levels and groundwater quality.
- Maintaining and updating the Data Management System (DMS) with newly collected data.
- Annual reporting of Subbasin conditions and submission to DWR as required by SGMA.
- Ongoing intra- and inter-basin coordination.

DWR proposed two recommended corrective actions that will enhance the GSP (below). The GSAs are in the process of revising the GSP to address them.

1. Providing more detailed explanation and justification regarding the selection of the sustainable management criteria for groundwater levels, particularly undesirable results, and minimum

thresholds, and quantitatively describe the effects of those criteria on the interests of beneficial uses and users of groundwater.

2. The GSA must provide more detailed explanation and justification regarding the selection of sustainable management criteria for degraded groundwater quality, particularly the selection and exclusion of constituents of concern for monitoring and sustainable management.

5.2 Progress Toward Achieving Interim Milestones

All SIs are in compliance with their MTs (see summary **Table 5-1**). An MT is the quantitative value that represents the groundwater conditions at an RMS site that, when exceeded individually or in combination with MTs at other monitoring sites, may cause a UR in the subbasin per DWR's definition. If groundwater levels are lower than the value of the MO for that site, they are moving in the direction of the MT. On the contrary, for the groundwater quality SMC, as the value of Total Dissolved Solids (TDS) concentrations increase from the MO established for that site, they are moving in the direction of the MT. Seawater Intrusion is not an applicable SI.

Groundwater elevations remained near the MOs in Spring 2023; two wells fell below their MO in Fall 2023. No wells fell below their MTs in WY 2023 and avoided URs since less than 20% of wells fell below their MTs for two consecutive years, hence avoiding URs as defined in the GSP.

Overall, groundwater conditions in the Subbasin are on track to meet the first 5-year 2027 Interim Milestones for groundwater levels at each of the RMS wells. Groundwater elevations are all above the MTs throughout the Subbasin, with elevations mostly near those observed in recent years (**Appendix A**). This positive trend is attributed to the ongoing recovery in groundwater conditions facilitated by increased precipitation to meet evapotranspiration demands in WY 2023. Spring 2023 groundwater elevations were above the MOs, although Fall 2023 groundwater elevations in two wells were below the MOs (**Table 5-2**), Spring 2024 groundwater conditions are expected to rebound.

Table 5-1. Sustainability Indicator Summary			
2023 Status	**Undesirable Result Identification**	**MO Definition**	**MT Definition**
Chronic Lowering of Groundwater Levels			
No indication of undesirable results There were no RMS with spring or fall 2023 groundwater level measurements below the MT.	25% of groundwater elevations measured at same RMS wells exceed the associated MT for two consecutive measurements.	**Upper & Lower Aquifer:** Spring 2015 groundwater elevation minus five feet (for wells with increasing or no groundwater trends) or projected Spring 2024 groundwater elevation minus five feet for wells with declining groundwater elevations.	**Upper Aquifer:** Spring groundwater elevation where less than 10% or less than 20% of domestic wells could potentially be impacted. **Lower Aquifer:** Spring groundwater elevation minus 20 to 120 feet.
Reduction of Groundwater Storage			
No indication of undesirable results There were no RMS with spring or fall 2023 groundwater level measurements below the MT.	Same as the chronic lowering of groundwater levels.	**Upper & Lower Aquifer:** Amount of groundwater storage when groundwater elevations are at their measurable objective.	**Upper & Lower Aquifer:** Amount of groundwater in storage when groundwater elevations are at their minimum threshold.
Degraded Water Quality			
No indication of undesirable results There were no RMS with TDS levels above their MTs.	At least 25% of RMS exceed the minimum threshold for water quality for two consecutive years at each well where it can be established that GSP implementation is the cause of the exceedance.	**Upper & Lower Aquifer:** California lower limit secondary MCL concentration for TDS of 500 mg/L measured at RMS wells.	**Upper & Lower Aquifer:** TDS concentration of 750 mg/L at all RMS wells.

Table 5-1. Sustainability Indicator Summary			
2023 Status	**Undesirable Result Identification**	**MO Definition**	**MT Definition**
Land Subsidence			
No indication of undesirable results No InSAR pixel exceeded MT in WY 2023.	50% of RMS exceed the minimum threshold over a 5-year period that is irreversible and is caused by lowering of groundwater elevations.	One foot over 20 years (Zero inelastic subsidence, in addition to any measurement error). If InSAR data are used, the measurement error is 0.1 feet and any measurement 0.1 feet or less would not be considered inelastic subsidence.	Two feet over 20 years (i.e., no more than 0.5 feet of cumulative subsidence over a five-year period (beyond the measurement error), solely due to lowering of groundwater elevations.
Depletion of Interconnected Surface Water			
No indication of undesirable results There were no RMS with spring or fall 2023 groundwater level measurements below the MT.	Same as the chronic lowering of groundwater levels.	Same as the chronic lowering of groundwater levels.	Same as the chronic lowering of groundwater levels.

Notes:

TDS is the primary water quality constituent of concern.

MO = Measurable Objective; MT = Minimum Threshold; RMS = representative monitoring site; mg/L = milligrams per liter; MCL = Maximum Contaminant Level; SMCL = Secondary Maximum Contaminant Level.

5.2.1 Chronic Lowering of Groundwater Levels and Reduction in Groundwater Storage SMC

The reduction in groundwater storage SMC utilizes the chronic lowering of groundwater levels SMC as a proxy (**Table 5-1**). Thus, groundwater conditions related to storage and chronic lowering of groundwater levels are discussed together. Groundwater conditions in the Subbasin are on track to meet the first 5-year 2027 Interim Milestones for groundwater levels at each of the RMS wells. In WY 2023, all groundwater elevations were above the established MTs (as indicated in **Table 5-2**). **Table 5-2** shows measurements from WY 2023 for spring seasonal highs and fall seasonal lows, along with MOs and MTs. It also compares the WY 2023 measurements to those from WY 2022 and to the MOs. Higher water levels were observed in Spring 2023 compared to Spring 2022 due to wet conditions, which has helped to increase recharge and offset extraction, bolstering groundwater storage in the Subbasin.

Table 5-2. Measurable Objectives, Minimum Thresholds, and Seasonal Groundwater Elevations of Representative Monitoring Site Wells

Representative Monitoring Site (RMS) ID	Groundwater Elevation (feet above mean sea level)				Spring 2023 vs. MO	Fall 2023 vs. MO	Spring 2023 vs. Spring 2022 (seasonal high)	Fall 2023 vs. Fall 2022 (seasonal low)
	2023 Measurements		MO	MT				
	Spring (seasonal high)	Fall (seasonal low)						
Upper Aquifer								
Ant-1U	242.13	228.93	231.10	193.40	11.03	-2.17	9.00	9.30
Ant-2U	243.03	228.63	231.20	181.40	11.83	-2.57	8.90	5.80
Ant-3U	246.90	--	231.10	193.00	15.80	--	5.10	--
Ant-4U	243.78	227.23	NA	NA	NA	NA	--	--
Lower Aquifer								
Ant-5L	241.73	216.62	NA	NA	NA	NA	--	--

MO = Measurable Objective, MT = Minimum Threshold, -- = Indicates Missing or Questionable Measurement, NA = Indicates non-determined MO, MT due to insufficient history

5.2.2 Degraded Water Quality SMC

The degraded water quality MT and MO are summarized in **Table 5-1**. TDS is the main constituent of concern in the Subbasin. TDS is measured at RMS wells throughout the Subbasin, and data was collected by the Tehama County GSA in 2024. TDS ranged from 180 mg/L to 390 mg/L. None of the wells exceeded MO or MT for TDS in 2024. Nitrate is a proposed SMC chemical for future monitoring and will be included in the revised GSP update anticipated in Spring 2024. A summary of groundwater quality monitoring data is available in **Appendix F**. Groundwater conditions are on track to avoid results related to water quality.

5.2.3 Land Subsidence SMC

The land subsidence MT and MO are summarized in **Table 5-1**. Interferometric Synthetic Aperture Radar (InSAR) data provided by DWR (DWR, 2024) was analyzed from October 2022 to October 2023 to track annual changes and from October 2015 to October 2023 to track net changes. Subsidence estimates based on InSAR methodology were reviewed and compared to continuous GPS measurements (Towill, 2023). The accuracy report found that a one-year measurement error, reported as a root-mean-squared error (RMSE), was approximately 0.025 feet. **Figure 5-1** shows a maximum vertical displacement between 0 feet and -0.02 feet within the RMSE and, therefore undetectable, occurred within the Subbasin from October 2022 to October 2023, where a positive change corresponds to a higher land surface elevation and a negative change corresponds to a lower land surface elevation relative to a reference elevation. Groundwater conditions in the Subbasin are on track to meet the first 5-year 2027 IMs and avoid URs for land subsidence. Conditions indicate that there has not been any inelastic land subsidence during the reporting period.

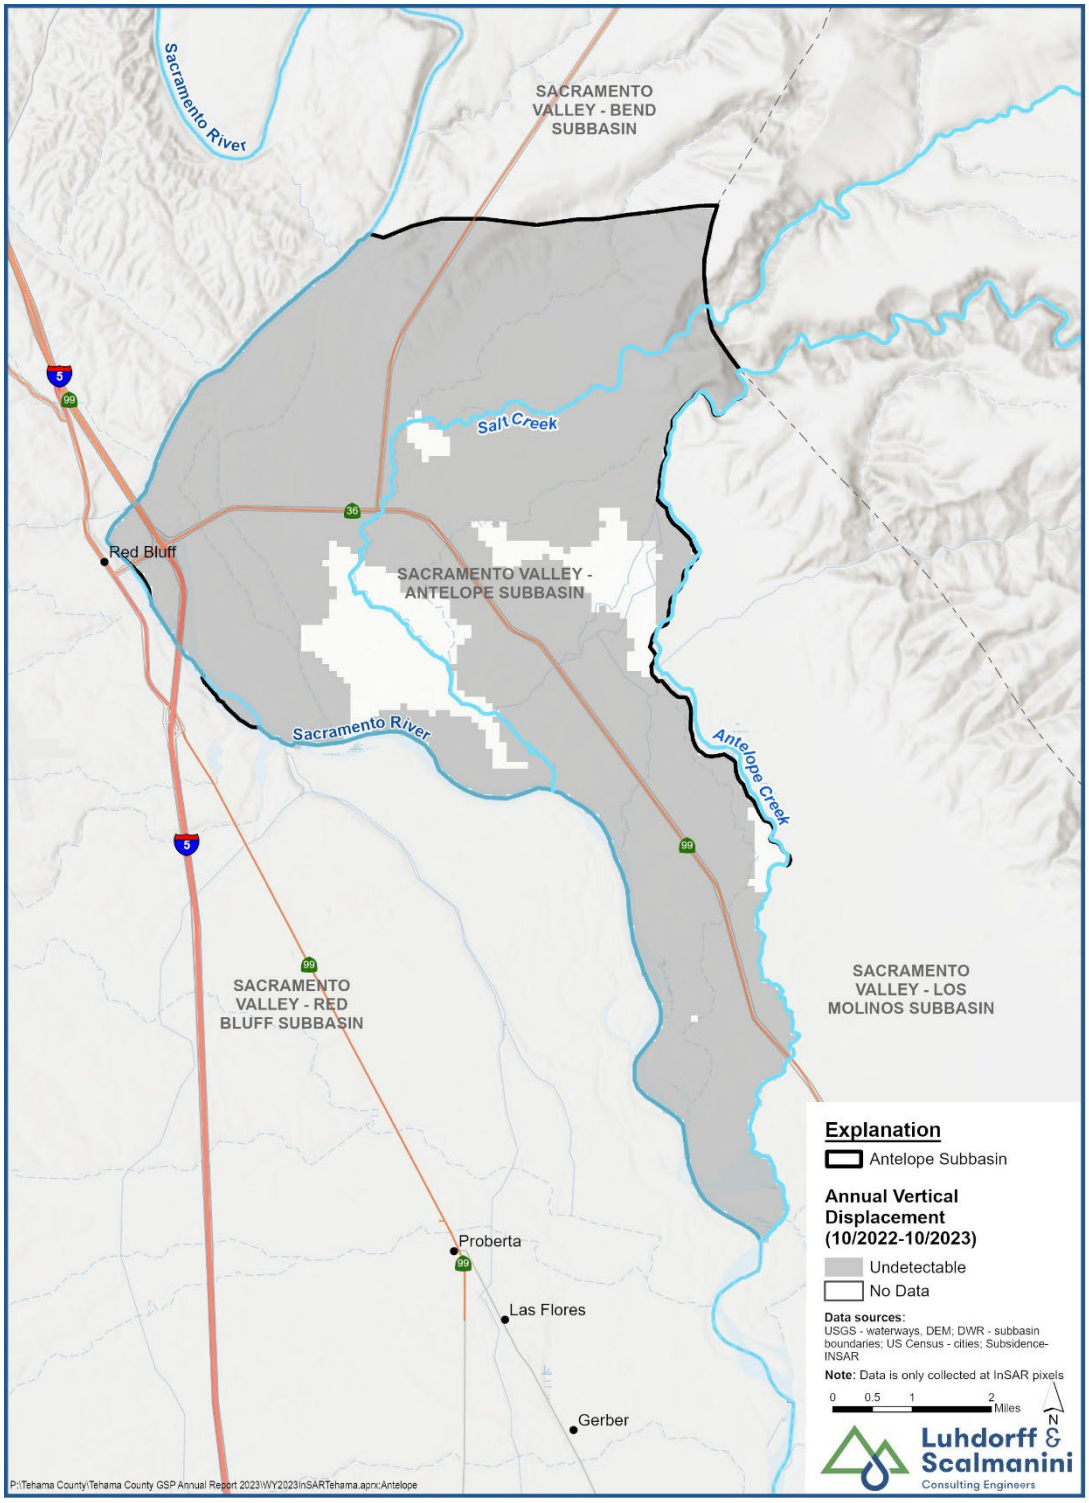


Figure 5-1. Change in Subsidence from 10/2022 to 10/2023

5.2.4 Depletion of Interconnected Surface Water SMC

The depletion of interconnected surface water SMC utilizes the chronic lowering of groundwater levels SMC as a proxy (**Table 5-1**). A subset of groundwater levels SMC RMS is used for this SMC (**Table 5-3**) and all groundwater elevations were above the established MTs. Groundwater conditions in the Subbasin are on track to meet the first 5-year 2027 IMs and to avoid URs for groundwater levels at each RMS.

Table 5-3 Measurable Objectives, Minimum Thresholds, Undesirable Results for Depletion of Interconnected Surface Water

State Well Number /Representative Monitoring Site (RMS) ID	Groundwater Elevation (feet above mean sea level)				Spring 2023 vs. MO	Fall 2023 vs. MO
	2023 Measurements		MO	MT		
	Spring (Seasonal High)	Fall (Seasonal Low)				
Ant-1U	242.13	228.93	231.10	193.40	11.03	-2.17
Ant-2U	243.03	228.63	231.20	181.40	11.83	-2.57
Ant-3U	246.90	--	231.10	193.00	15.80	--
Ant-4U	243.78	227.23	NA	NA	NA	NA

MO = Measurable Objective, MT = Minimum Threshold, -- = Indicates Missing or Questionable Measurement, NA = Indicates non-determined MO, MT due to insufficient history

5.3 Progress Toward PMA Implementation

The following sections summarize the Tehama County GSA's progress towards implementing PMAs that were developed to manage groundwater conditions in the Subbasin and achieve the groundwater sustainability objectives described in the GSP. Projects as outlined in the GSP are provided below and summarized in **Table 5-4.** Updates on the status of management actions are described below and summarized below **Section 5-4** and **Table 5-5**.

Groundwater users in the Subbasin benefit from generally stable groundwater levels in the Subbasin. Surface water supplies available to diverters in the Subbasin are used, when available, for irrigation and for the benefit of other recharge efforts and projects described in the GSP. Ongoing access to surface water supplies is crucial to preserving the sustainability of the Subbasin.

Table 5-4. Summary of Project Implementation Status

GSP Section Reference	Project Name	Current Status	Notable Progress Since Last Annual Report
4.2	Ongoing Monitoring, Data Gaps, and Enhancements	Funded	DWR SGM Grant Program application submitted in December 2022 was funded to address data gaps identified in the GSP.

Table 5-5. Summary of Management Actions			
GSP Section Reference	Management Action	Current Status	Notable Progress Since Last Annual Report
4.5.2.6	Well Management Program	In Progress	Program is in its second year, well inventory is in progress.

5.4 GSP Project Implementation Progress

5.4.1 Ongoing Monitoring, Data Gaps, and Enhancements (GSP Section 4.2.1)

Advancements have been made on this project since 2022, including identifying sites for multi-completion wells and surface water groundwater monitoring sites within the subbasin, developing a synoptic stream gaging monitoring plan, conducting a biological investigation to determine the locations of groundwater-dependent ecosystems, establishing a community domestic monitoring program, and expanding the groundwater level and quality network throughout the Subbasin.

5.5 GSP Management Action Implementation Progress

Below are Management Action Updates and their progress in implementation since the last Annual Report.

5.5.1 Well Management Program (GSP Section 4.5.2.6)

Tehama County GSA is in its second year of administering a well registration program that provides information about the location, number, and construction of wells. It will also eventually provide a source of funding for GSP implementation and a future well mitigation program.

6 CONCLUSIONS

The Tehama County GSA adopted and submitted the GSP to DWR in January 2022. Following the analyses of historical and current hydrogeological conditions presented in the GSP, the Tehama County GSA has been actively working on sustainable groundwater management in the Subbasin. As presented in **Section 5** of this report, recent progress made on activities applicable to the Tehama County GSA demonstrates the commitment of the Tehama County GSA to implement the GSP by allocating the necessary time and resources to achieve long-term sustainable management of the groundwater resources in the Antelope Subbasin.

7 REFERENCES

California Department of Water Resources (DWR). 2018. 5-021.74 Sacramento Valley-Antelope Basin Boundaries Description. Retrieved at: https://data.cnra.ca.gov/dataset/ca-gw-basin-boundary-descriptions/resource/2385b4bd-4858-4902-b98d-19936ee3f21e.

California Department of Water Resources (DWR). 2023. Periodic Groundwater Level Measurements - Datasets - California Natural Resources Agency Open Data. Downloaded February 2023. Available at: https://data.cnra.ca.gov/dataset/periodic-groundwater-level-measurements.

California Department of Water Resources (DWR). 2024. TRE ALTAMIRA InSAR Subsidence Data. Available At: https://data.cnra.ca.gov/dataset/tre-altamira-insar-subsidence.

California State Water Resources Control Board. 2023a. Electronic Water Rights Information Management System (eWRIMS). Accessed March 13, 2023. Available at: https://www.waterboards.ca.gov/waterrights/water_issues/programs/ewrims/.

California State Water Resources Control Board. 2023b. Groundwater Ambient Monitoring and Assessment Program. Available at: https://www.waterboards.ca.gov/gama/.

City of Red Bluff. 2020. 2020 Urban Water Management Plan. https://cms5.revize.com/revize/redbluff/2020_UWMP_CERTIFIED.pdf.

Tehama County Flood Control and Water Conservation District Groundwater Sustainability Agency (Tehama County GSA). 2022. Available at: https://sgma.water.ca.gov/portal/gsp/preview/134

Tehama County Flood Control and Water Conservation District Groundwater Sustainability Agency (Tehama County GSA). 2023. WY 2022 Antelope Subbasin Groundwater Sustainability Plan Annual Report. Available at: https://sgma.water.ca.gov/portal/service/gspar/document/2323.

Towill. 2023. InSAR Data Accuracy for California Groundwater Basins CGPS Data Comparative Analysis January 2015 to October 2022. Available At: https://data.cnra.ca.gov/dataset/tre-altamira-insar-subsidence/resource/b9f6f30b-e998-4cf1-b4e1-5d530356f172.


Water Year 2023 Annual Report


Appendix A


Hydrographs of Representative Monitoring Site (RMS) Wells

Antelope Subbasin − State Well Number (SWN) 27N03W16K003M (Ant−1U)


Upper Aquifer Well Depth: 137 ft. Perforation top & bottom: 117 − 137 ft bgs

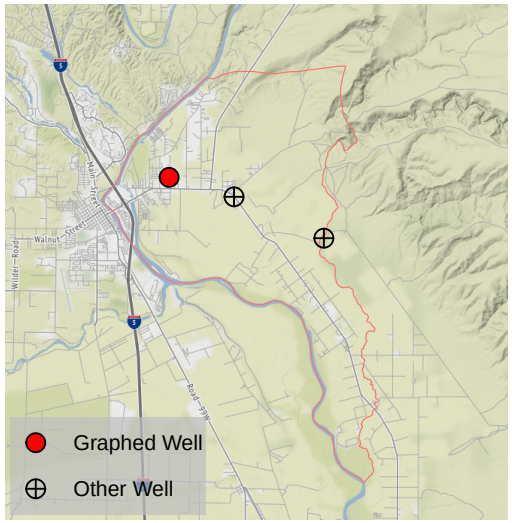

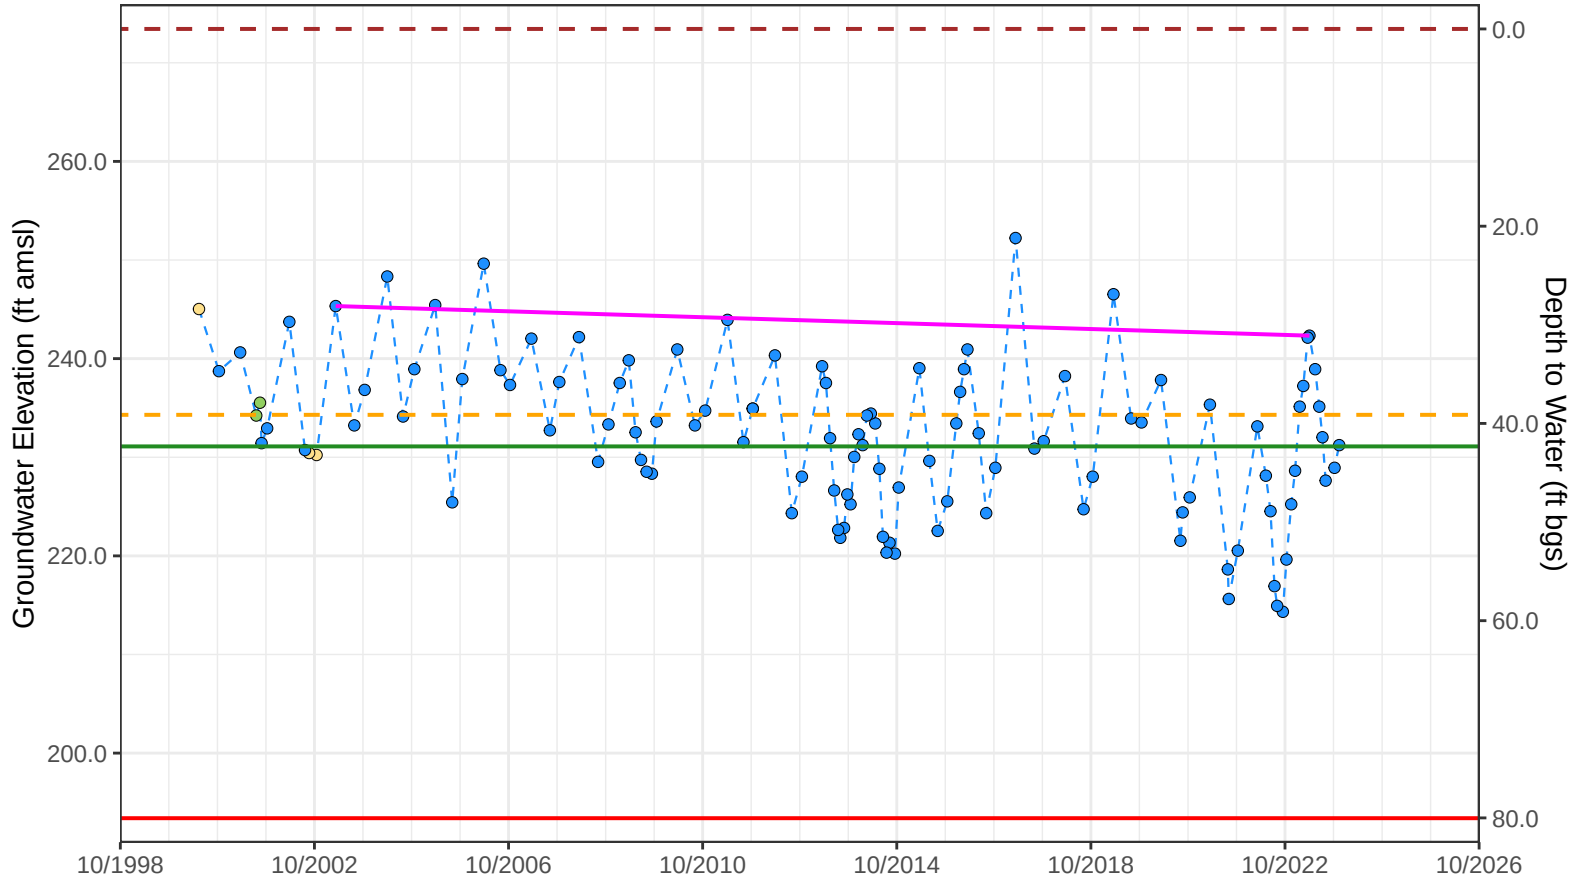

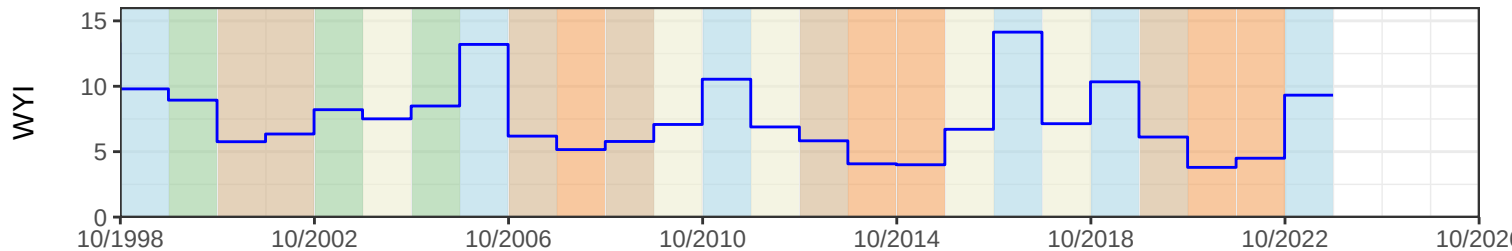


Statistics of spring water levels for
past 20 years (2003 to 2023):
Change = −3 ft
Average rate of change = −0.15 ft/year
Average water level = 241.81 ft amsl

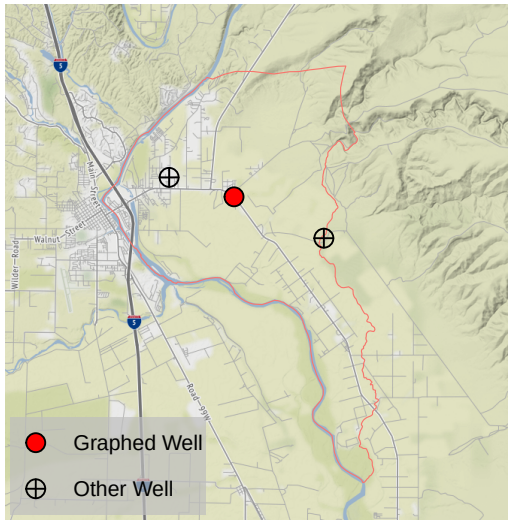


Antelope Subbasin − State Well Number (SWN) 27N03W23D001M (Ant−2U)

Upper Aquifer Well Depth: 250 ft. Perforation top & bottom: 30 − 155 ft bgs

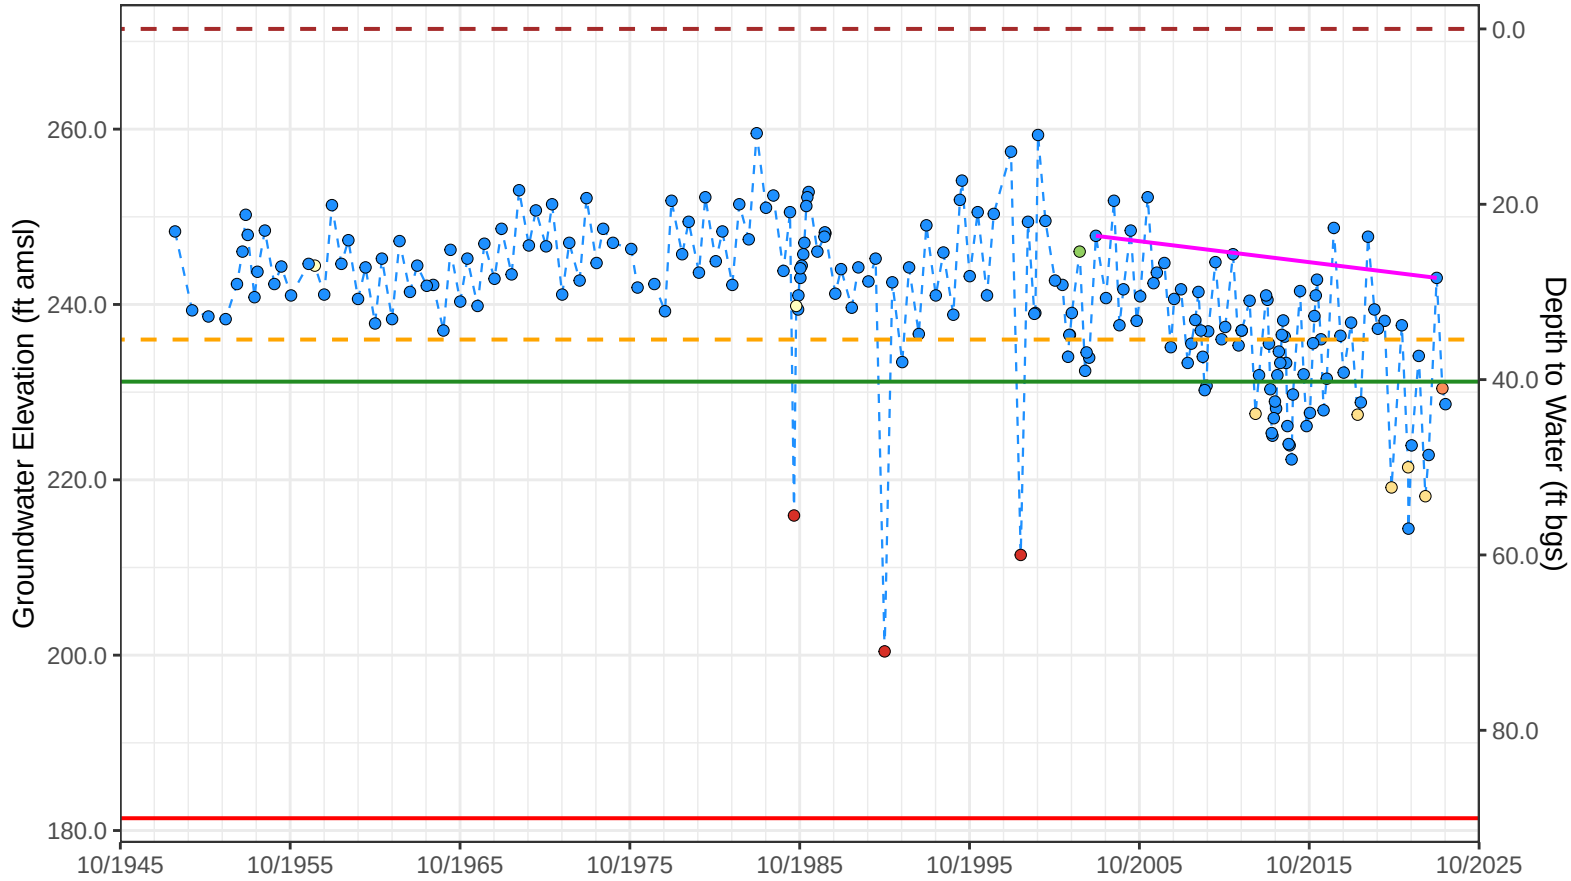

Good measurement
Pumping
Nearby pump operating
Pumped recently
Oil or foreign substance in casing
Affected by other conditions
GSE
MO
MT
5−year Interim milestone
Recent spring water level trend

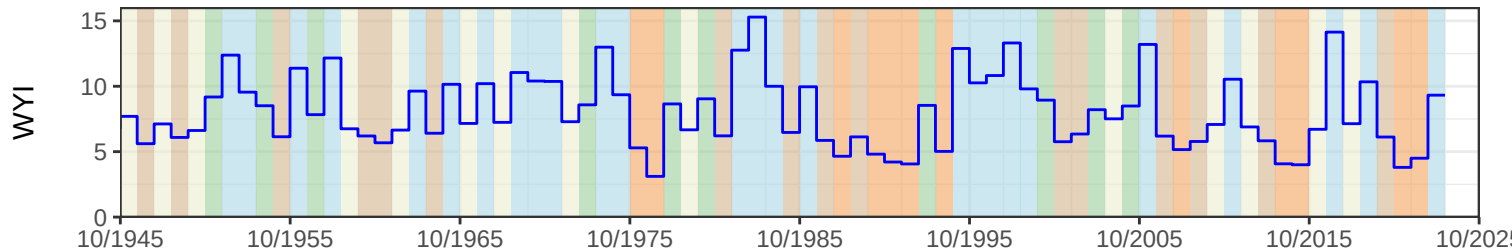



Sacramento Valley Water Year Index
WY Type: Wet Above Normal Below Normal Dry Critical

Statistics of spring water levels for past 20 years (2003 to 2023):
Change = −4.8 ft
Average rate of change = −0.24 ft/year
Average water level = 246.75 ft amsl


Antelope Subbasin − State Well Number (SWN) 27N02W30C003M (Ant−3U)

Upper Aquifer Well Depth: 170 ft. Perforation top & bottom: 157 − 170 ft bgs

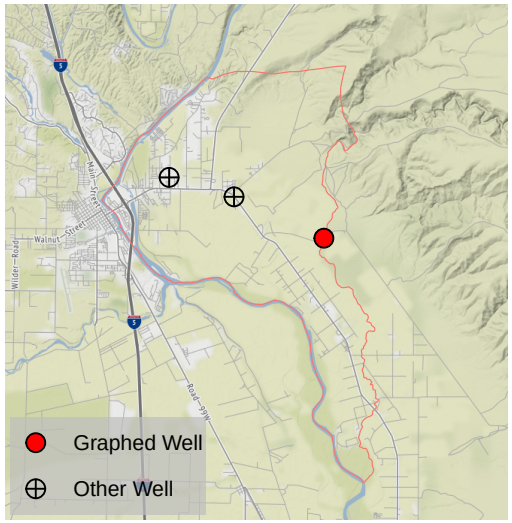

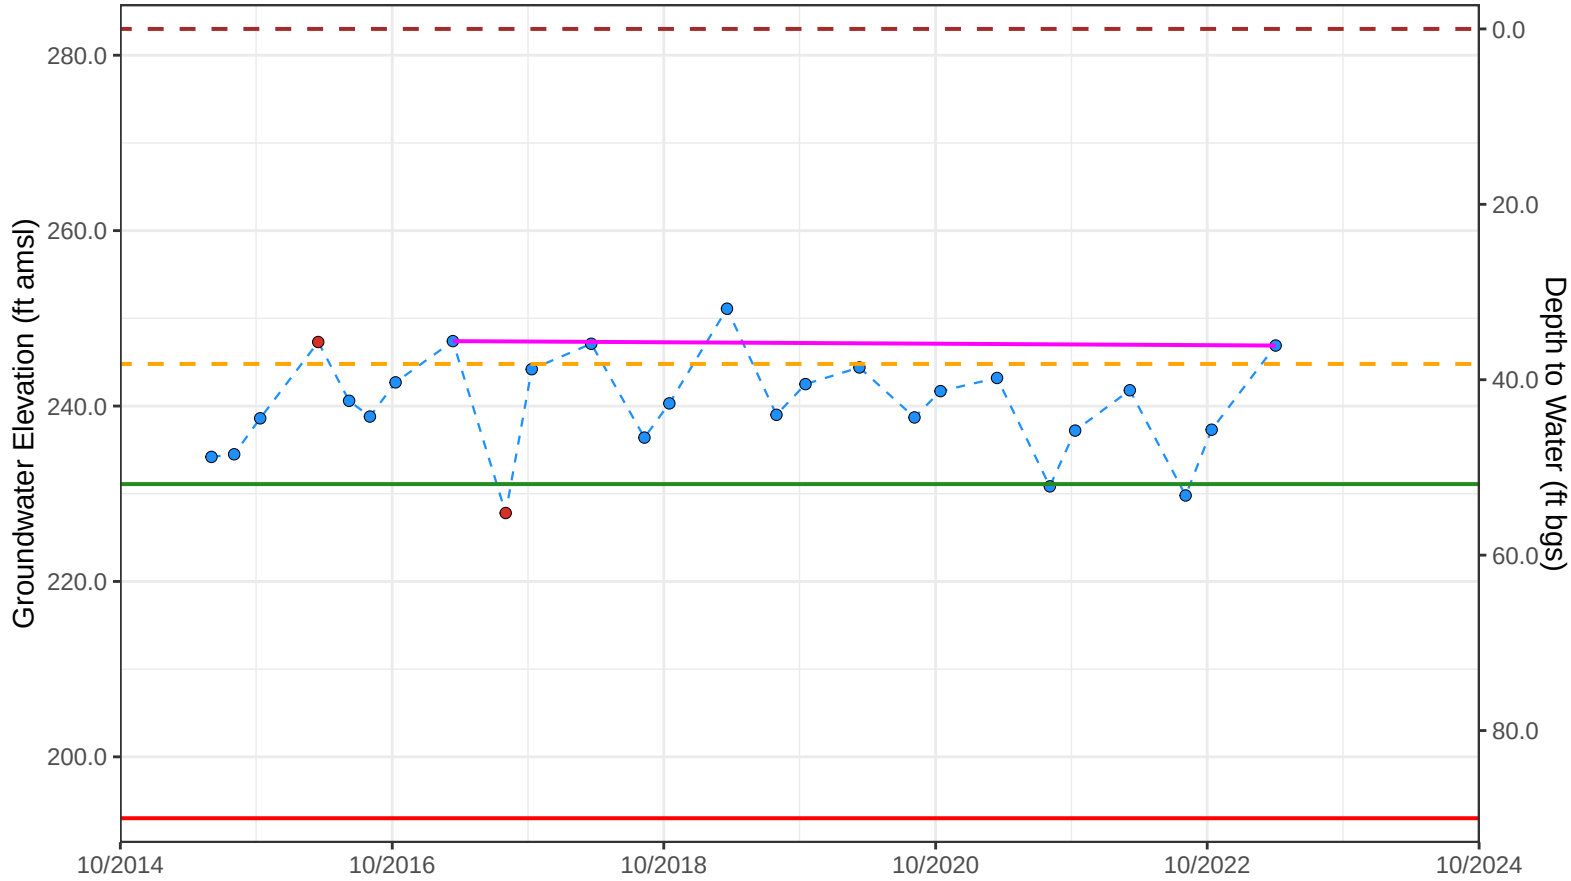

Statistics of spring water levels for past 6 years (2017 to 2023):
Change = −0.5 ft
Average rate of change = −0.08 ft/year
Average water level = 245.99 ft amsl

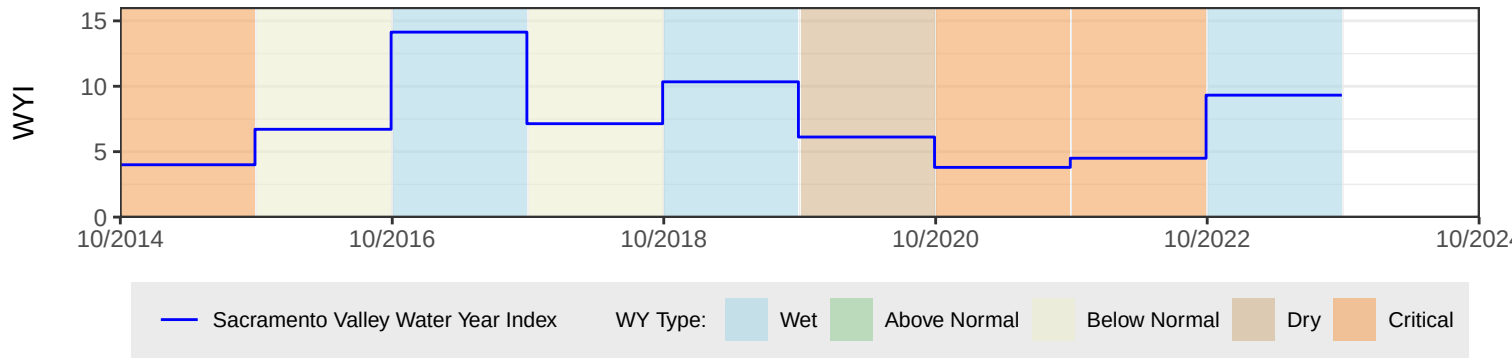

Water Year 2023 Annual Report

Appendix B

Explanation of Sustainable Management Criteria

Appendix B: Explanation of Sustainable Management Criteria

The Sustainable Groundwater Management Act (SGMA) requires a Groundwater Sustainability Plan (GSP) to define Sustainable Management Criteria (SMC) for the groundwater subbasin. The SMC offer guideposts and guardrails for groundwater managers seeking to achieve sustainable groundwater management. SGMA defines sustainable groundwater management as "the management and use of groundwater in a manner that can be maintained during the planning and implementation horizon without causing undesirable results," where the planning and implementation horizon is 50 years with the first 20 years spent working toward achieving sustainable groundwater management and the following 30 years (and beyond) spent maintaining it (California Water Code §10721).

"Undesirable Results" are associated with up to six Sustainability Indicators (SI), including groundwater levels, groundwater storage, water quality, seawater intrusion, land subsidence, and interconnected surface water. SGMA defines undesirable results as those having significant and unreasonable negative impacts. Failure to avoid undesirable results on the part of the GSAs may lead to intervention by the State. Once the sustainability goal and undesirable results have been locally identified, projects and management actions are formulated to achieve the sustainability goal and avoid undesirable results.



SI and associated undesirable results, if significant and unreasonable

The associated undesirable results for each SI have been defined similarly across the Butte Subbasin. In turn, the rationale and approach for determining Minimum Thresholds and Measurable Objectives for each SI are the same across the Butte Subbasin.

The terminology for describing SMC is defined as follows:

Undesirable Results – Significant and unreasonable negative impacts associated with each SI.

Minimum Threshold (MT) – Quantitative threshold for each SI used to define the point at which undesirable results may begin to occur.

Measurable Objective (MO) – Quantitative target that establishes a point above the MT that allows for a range of active management to prevent undesirable results.

Margin of Operational Flexibility – The range of active management between the MT and the MO.

Interim Milestones (IMs) – Targets set in increments of five years over the implementation period of the GSP offering a path to sustainability.

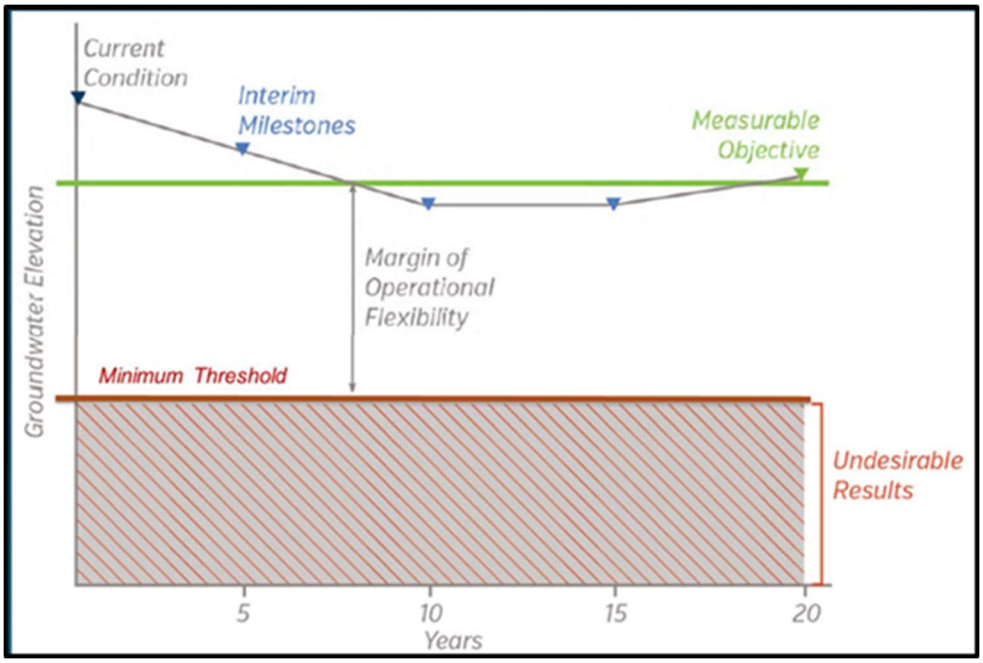


Illustration of Terms Used for Describing Sustainable Management Criteria Using the Groundwater Level SI

The Figure above illustrates these terms for the groundwater level SI.

SI are intended to be measured and compared against quantifiable SMC throughout a monitoring framework of Representative Monitoring Site (RMS) wells. Ongoing monitoring of SI can:

Determine compliance with the adopted GSP

Offer a means to evaluate the effectiveness of projects and management actions over time

Allow for course correction and adaptation in five-year updates

Facilitate understanding among diverse stakeholders

Support decision-making on the part of the GSAs into the future

The SMC for the Antelope Subbasin is fully explained and defined in Section 3 of the

GSP available here: https://sgma.water.ca.gov/portal/gsp/preview/134

Water Year 2023 Annual Report

Appendix C

GSP Annual Reporting Elements Guide

Groundwater Sustainability Plan Annual Report Elements Guide

Basin Name	Antelope Subbasin		
GSP Local ID			
California Code of Regulations - GSP Regulation Sections	***Groundwater Sustainability Plan Elements***	**Document *page number(s) that address the applicable GSP element.***	***Notes: Briefly describe the GSP element does not apply.***
Article 5	**Plan Contents**		
Subarticle 4	***Monitoring Networks***		
§ 354.40	**Reporting Monitoring Data to the Department**		
	Monitoring data shall be stored in the data management system developed pursuant to Section 352.6. A copy of the monitoring data shall be included in the Annual Report and submitted electronically on forms provided by the Department.	34-37; 62-74	
	Note: Authority cited: Section 10733.2, Water Code. Reference: Sections 10728, 10728.2, 10733.2 and 10733.8, Water Code.		
Article 7	**Annual Reports and Periodic Evaluations by the Agency**		
§ 356.2	**Annual Reports**		
	Each Agency shall submit an annual report to the Department by April 1 of each year following the adoption of the Plan. The annual report shall include the following components for the preceding water year:		
	(a) General information, including an executive summary and a location map depicting the basin covered by the report.	5-14	
	(b) A detailed description and graphical representation of the following conditions of the basin managed in the Plan:		
	(1) Groundwater elevation data from monitoring wells identified in the monitoring network shall be analyzed and displayed as follows:		
	(A) Groundwater elevation contour maps for each principal aquifer in the basin illustrating, at a minimum, the seasonal high and seasonal low groundwater conditions.	17-18	
	(B) Hydrographs of groundwater elevations and water year type using historical data to the greatest extent available, including from January 1, 2015, to current reporting year.	41-43	
	(2) Groundwater extraction for the preceding water year. Data shall be collected using the best available measurement methods and shall be presented in a table that summarizes groundwater extractions by water use sector, and identifies the method of measurement (direct or estimate) and accuracy of measurements, and a map that illustrates the general location and volume of groundwater extractions.	20-21	
	(3) Surface water supply used or available for use, for groundwater recharge or in-lieu use shall be reported based on quantitative data that describes the annual volume and sources for the preceding water year.	22	
	(4) Total water use shall be collected using the best available measurement methods and shall be reported in a table that summarizes total water use by water use sector, water source type, and identifies the method of measurement (direct or estimate) and accuracy of measurements. Existing water use data from the most recent Urban Water Management Plans or Agricultural Water Management Plans within the basin may be used, as long as the data are reported by water year.	22-23	
	(5) Change in groundwater in storage shall include the following:		
	(A) Change in groundwater in storage maps for each principal aquifer in the basin.	48	
	(B) A graph depicting water year type, groundwater use, the annual change in groundwater in storage, and the cumulative change in groundwater in storage for the basin based on historical data to the greatest extent available, including from January 1, 2015, to the current reporting year.	27	
	(c) A description of progress towards implementing the Plan, including achieving interim milestones, and implementation of projects or management actions since the previous annual report.	30-38	

Water Year 2023 Annual Report

Appendix D

DWR Upload Tables

A. Groundwater Extractions

Total Groundwater Extractions (AF)	Water Use Sector Urban (AF)	Water Use Sector Industrial (AF)	Water Use Sector Agricultural (AF)	Water Use Sector Managed Wetlands (AF)	Water Use Sector Managed Recharge (AF)	Water Use Sector Native Vegetation (AF)	Water Use Sector Other (AF)	Water Use Sector Other Description
18,000	400	0	17,000		0	-	300	Rural Residential

B. Groundwater Extraction Methods

Meters Volume (AF)	Meters Description	Meters Type	Meters Accuracy (%)	Meters Accuracy Description	Electrical Records Volume (AF)	Electrical Records Description	Electrical Records Type	Electrical Records Accuracy (%)	Electrical Records Accuracy Description	Land Use Volume (AF)	Land Use Description	Land Use Type	Land Use Accuracy (%)	Land Use Accuracy Description	Groundwater Model Volume (AF)	Groundwater Model Description	Groundwater Model Type	Groundwater Model Accuracy (%)	Groundwater Model Accuracy Description	Other Method(s) Volume (AF)	Other Method(s) Description	Other Method(s) Type	Other Method(s) Accuracy (%)	Other Method(s) Accuracy Description
400	Metered Municipal Wells	Direct	5%	Metered connection maintained by City of Red Bluff and Los Molinos Mutual Water Company	0					17,000	Land use estimates were derived from crop mapping and CropScape survey results	Estimate	20%	Typical uncertainty for water balance calculation	0					300	Rural residential groundwater extraction is estimated based on City of Red Bluff's 2020 Urban Water Management Plan 2020 usage of an average per capita water use of 253 gallons per capita per day. Population data from the 2020 census was coupled with parcel data to identify total population not serviced by municipal supplies	Estimate	15%	Uncertainties are from population estimates and gallon per capita per day estimates

C. Surface Water Supply

Total Surface Water Supply (AF)	Methods Used To Determine	Water Source Type Central Valley Project (AF)	Water Source Type State Water Project (AF)	Water Source Type Colorado River Project (AF)	Water Source Type Local Supplies (AF)	Water Source Type Local Imported Supplies (AF)	Water Source Type Recycled Water (AF)	Water Source Type Desalination (AF)	Water Source Type Other (AF)	Water Source Type Other Description
9,000	Diversions for local supplies are estimated based on historic State Water Resource Control Board eWRIMS (Electronic Water Rights Information Management System) data for total diversions. Surface water delivery estimates are based on historic deliveries in the area that have occurred in dry and critical years	0	0	0	9,000	0	0	0	0	

D. Total Water Use

Total Water Use (AF)	Methods Used To Determine	Water Source Type Groundwater (AF)	Water Source Type Surface Water (AF)	Water Source Type Recycled Water (AF)	Water Source Type Reused Water (AF)	Water Source Type Other (AF)	Water Source Type Other Description	Water Use Sector Urban (AF)	Water Use Sector Industrial (AF)	Water Use Sector Agricultural (AF)	Water Use Sector Managed Wetlands (AF)	Water Use Sector Managed Recharge (AF)	Water Use Sector Native Vegetation (AF)	Water Use Sector Other (AF)	Water Use Sector Other Description
27,000	Methods used are a combination of estimates based on land use and population/ per capita water use, metered municipal water use, and estimates based on historic water rights data for dry and critical years	18,000	9,000	0	0	0		400	0	26,000	-	0	-	300	Rural Residential

Water Year 2023 Annual Report

Appendix E

Water Use Analysis Methodology

TECHNICAL MEMORANDUM

To: Luhdorff and Scalmanini Consulting Engineers

From: Davids Engineering, Inc.

Date: Friday, February 09, 2024

Subject: **DRAFT - Water Use Analysis Methodology**

1 Introduction

Pursuant to the Groundwater Sustainability Plan (GSP) regulations (23 CCR[1] Section 356.2), the GSP Annual Report for the Antelope Subbasin (Subbasin) includes quantification of water supplies and water uses in the reporting year, including groundwater extraction by water use sector[2]. Water supplies and water uses in the Subbasin have been quantified based on the best available data sources and information, either collected from measured records or estimated where necessary.

While some groundwater extraction in the Subbasin is measured, most groundwater extraction is unmeasured, including extraction from privately owned wells. For the Antelope Subbasin Annual Report (Annual Report), the approach used to estimate unmeasured groundwater extraction for the agricultural water use sector is referred to as the Groundwater Extraction Estimates from Earth Observations (GEEEO) process. In this approach, a spatial water use analysis is computed on a monthly basis using current land use data, climate conditions (e.g., precipitation and evapotranspiration), crop water demands, and other local information, allowing for estimation of total water use and estimated groundwater extraction, after accounting for the use of other available water supplies.

This approach differs from the water budget methodology used in GSP development, where the Tehama Integrated Hydrogeological Model (TIHM) was used to generate historical, current, and projected water budgets for the Subbasin. The shift toward the GEEEO process is due to the time and cost constraints associated with updating the GSP groundwater model annually. Despite this change, key inputs and results from the GEEEO process have been compared with those of the GSP groundwater model to ensure consistency in the water use analyses.

This technical memorandum (TM) describes the methodology and data sources used in the GEEEO process. Results of the GEEEO process are documented in the Annual Report.

[1] California Code of Regulations, Title 23, Division 2, Chapter 1.5, Subchapter 2. Groundwater Sustainability Plans.
[2] Water use sectors are identified in the GSP Regulations as “categories of water demand based on the general land uses to which the water is applied, including urban, industrial, agricultural, managed wetlands, managed recharge, and native vegetation” (23 CCR Section 351(al)).

2 GEEEO Process and Computational Approach

2.1 Computational Approach

The GEEEO process utilizes available geospatial data and information to quantify water use, including groundwater extraction volumes, spatially across the Subbasin:

1. First, geospatial evapotranspiration (ET) information at a pixel-scale is used to quantify the total consumptive water use and total applied water requirements during a given time period in a given area of the Subbasin, and geospatial land use information is used to help identify where irrigation water may have been applied (i.e., whether the area in question features irrigated agricultural land, versus idled land or undeveloped vegetation).
2. After quantifying total applied water requirements, available surface water supply and groundwater extraction data is incorporated into the GEEEO process by distributing that water out to specific regions where that water is applied (e.g., irrigated lands in surface water supplier service areas).
3. The remaining groundwater extraction needed to meet applied water demands is then calculated based on the difference between total applied water requirements and available water supply information, with consideration for effective precipitation.
4. Finally, the pixel-scale results can then be aggregated to the desired spatial or temporal domains of interest.

The result is a spatially distributed water use analysis calculated with a finer spatial resolution than was possible in the GSP water budgets. The pixel-scale water budget results provide greater insight into where water use occurs in the Subbasin and are configurable to create water use summaries for any region of the Subbasin. Additional details about the GEEEO computational approach are provided in Attachment A, generally following the process described in Hessels et al. (2022).

2.2 Spatial Resolution

GEEEO quantifies water use and groundwater extraction volumes with pixel-scale resolution (30 meters (m) x 30 m), corresponding to the spatial resolution of satellite imagery used in developing many of the GEEEO inputs. For those inputs that are not available at the 30 m x 30 m resolution, available data and information is distributed as averages over the area where that information is applicable (e.g., district-reported surface water deliveries are distributed as an average acre-feet per acre (AF/ac) over irrigated lands in that district's service area[3]). Additional information about the spatial resolution of specific data sources is provided in Section 3.

The fine spatial resolution of the GEEEO inputs and computations allows for highly configurable GEEEO results summaries. For the Annual Report, results are summarized by subregions that are defined to roughly correspond with the boundaries of the water budget regions in the GSP groundwater model, with distinction between water districts, managed wetlands and refuge areas, and out-of-district lands.

[3] Future refinements to the GEEEO process could potentially incorporate field-scale surface water delivery records to improve spatial detail of results rather than equally distributing surface water deliveries across the irrigated lands within the district's service area.

2.3 Period and Timestep

For each Annual Report, the GEEEO process operates from 2016 through the current reporting year[4] on a monthly timestep, although only the results from the current reporting year are included in the Annual Report. The period and timestep are set according to data availability and reporting needs. However, the GEEEO process is configurable to operate on different timescales (e.g., daily or weekly). The start year is currently limited by the availability of geospatial ET information from OpenET, although further historical ET information is expected to be available in the near future.

3 Data Sources

The GEEEO process uses data sources and information that capture the unique, local conditions within the Subbasin to the extent available. Details about the data and information used in the GEEEO process are described below.

3.1 Evapotranspiration

ET, or consumptive water use, is the major driver of water use in the Subbasin, particularly agricultural use. In this context, consumptive water use is defined as "*the part of water withdrawn that is evaporated, transpired, incorporated into products or crops, consumed by humans or livestock, or otherwise removed from the immediate water environment*" (ASCE, 2016). Unlike surface runoff or infiltration of water into the groundwater system (through seepage, deep percolation, managed recharge, or other means), ET is water that cannot be recovered or directly reused in the Subbasin.

In the GEEEO process, ET is quantified from satellite-based remote sensing analyses available from OpenET. OpenET is a multi-agency web-based geospatial information system (GIS) utility that quantifies ET over time with a spatial resolution of 30 m x 30 m (approximately 0.22 acres). OpenET information is available in raster coverages of the Subbasin on both a daily and monthly timestep from 2016 through present.[5] The GEEEO process utilizes monthly rasters of the ensemble ET from OpenET to calculate total water use for the Annual Report.

While OpenET is a new utility, the underlying methodologies to quantify ET apply a variety of well-established modeling approaches that are widely used in government and research applications. The OpenET modeling approaches are also similar to the approaches used to quantify ET in the GSP groundwater model. Additional information about the OpenET team, data sources, and methodologies are available at: https://openetdata.org/.

3.2 Land Use

Areas in each water use sector in the Subbasin were identified using the most recent and reliable spatial land use data in the region, including:

1. Statewide crop mapping, available from the California Department of Water Resources (DWR) (DWR, 2024)

[4] Annual Reports are required to be submitted by April 1 each year following the adoption of the GSP. The current reporting year for each Annual Report is the preceding water year (i.e., October 1 through September 30)
[5] OpenET raster information is typically available within about one month after the period has ended.

2. CropScape Cropland Data Layer coverage, available from the United States Department of Agriculture (USDA, 2024).

Land use data from these sources were compiled into 30 m x 30 m raster coverages of the Subbasin. To prepare the GEEEO process inputs, DWR data, which includes extensive ground-truthing review of results, is preferentially used to identify agricultural land (including irrigated and non-irrigated lands) and urban areas, and then USDA data is utilized to back-fill gaps of non-irrigated, idled, and non-developed land in the Subbasin. Local refinements are also applied, as needed, to account for local land use information.

These land use data sources and applications were similar to those used in development of the GSP water budgets. Comparisons were made to evaluate the consistency of the datasets and with earlier land use analyses; good correspondence was found for the major land use classes found in the Subbasin.

DWR data is typically available in provisional form approximately two years after a given year has passed. USDA data is typically available for the prior year in early- to mid-February. When data for the current reporting year is not yet available, raster coverages of the Subbasin are generally assembled utilizing land use data from the most recent, hydrologically similar year (i.e., similar water supply conditions and similar cropping patterns, to the extent possible). Idling of annual and ponded crops in a given year may also be locally refined through comparison with USDA data for the current reporting year or through an analysis of vegetation coverage in the current reporting year. However, it is noted that land use data is only used in the GEEEO process to identify areas in each water use sector where water is applied. The total water use for lands in the agricultural and managed wetlands water use sectors are determined through an analysis of OpenET data, regardless of the precise land use classification.

3.3 Precipitation

Spatial precipitation estimates were extracted from the Parameter-elevation Regressions on Independent Slopes Model (PRISM), developed by the PRISM Climate Group at Oregon State University. PRISM quantifies spatial precipitation estimates, among other climate parameters, based on available weather station data and modeled spatial relationships with topography and other factors influencing weather and climate.

PRISM data is available in raster coverages of the Subbasin on both a daily and monthly timestep, with a spatial resolution of 4 kilometer (km) x 4 km. The GEEEO process utilizes monthly rasters for the Annual Report analysis, and the precipitation results for each 4 km pixel are applied to each of the 30 m pixels within it (i.e., downscaled) for which ET and land use data are available. Additional information about the PRISM data and methodologies are available at: https://prism.oregonstate.edu. PRISM precipitation data is consistent with the historical precipitation inputs to the GSP groundwater model.

PRISM precipitation data along with rooting estimated mean rooting depths from the rooting depth ranges listed in Appendix B of ASCE 70 (2016) is used to create pixel-level estimates of effective precipitation (ETPR). For crops not listed in ASCE 70, rooting depths are based on rooting depths of similar crops and professional judgement. ETPR is computed using the National Engineering Handbook Part 623 method (USDA, 1993).

3.4 Local Water Supply Data

As described in Section 2, available surface water supply and groundwater extraction data is incorporated into the GEEEO process to quantify the amount of known water supply available, prior to estimating the remaining groundwater extraction needed to meet demand. Water supply data is distributed as averages over the area where that information is applicable (e.g., average AF/ac over lands where that water is available for use).

Surface water supply and groundwater extraction data are collected from both publicly available and local sources. Information gathered may include, where applicable:

1. Water supply contract delivery records, from the United States Bureau of Reclamation (USBR), State Water Project (SWP), or other publicly available sources as applicable.
2. Water rights diversions records, from the State Water Resources Control Board (SWRCB) through the Electronic Water Rights Information Management System (eWRIMS)
3. Data requests to local water agencies and water users, requesting surface water diversions, surface water deliveries, surface water outflows, groundwater pumping records, or other available water use data.

In cases where current surface water data is not available, general information on surface water inflows and outflows may be gathered from other local sources as available (e.g., Agricultural Water Management Plan water budgets). More information about surface water data sources is described in the Annual Report.

While groundwater extraction data is not available in many parts of the Subbasin, local data is requested each year so that new data can be incorporated into the GEEEO process as it becomes available. It is noted that while groundwater extraction for municipal water supply systems is generally reported for urban areas in the Annual Report based on SWRCB and locally provided data, groundwater extraction for municipal areas is not directly included in the GEEEO process due to underlying differences in how the majority of water is used in urban areas. This also applies to estimates of rural residential groundwater use (e.g., domestic water use pumped through private domestic wells) outside of urban areas. The data sources and approaches used to quantify municipal and rural residential groundwater extraction are described in the Annual Report.

3.5 Other Agronomic Data

Other agronomic and climate-related data that is incorporated into the GEEEO process includes:

1. Representative consumptive use fractions for crops (i.e., fraction of total applied water that is consumed through ET). Values are based on typical irrigation methods and efficiencies for crops.
2. Conveyance system fractions for subregions (i.e., fraction of diverted water that is delivered, accounting for losses).
3. Reuse fractions for subregions (i.e., fraction of delivered water that is reused).

Information gathered from local sources is used where available, otherwise representative values for agronomic practices in the region are used.

4 References

American Society of Civil Engineers (ASCE). 2016. ASCE Manuals and Reports on Engineering Practice No. 70, Evaporation, Evapotranspiration, and Irrigation Water Requirements (Second Edition).

California Department of Water Resources (DWR). 2024. Provisional 2022 Statewide Crop Mapping GIS Data, Updated January 2024. Available at: https://data.cnra.ca.gov/dataset/statewide-crop-mapping.

Hessels, T., Davids J. C., and Bastiaanssen W. 2022. Scalable Water Balances from Earth Observations (SWEO): Results from 50 Years of Remote Sensing in Hydrology. Water International, 47(6), 866-886.

United States Department of Agriculture (USDA). 2024. CropScape – 2023 Cropland Data Layer, Released January 2024. Available at: https://nassgeodata.gmu.edu/CropScape/.

United States Department of Agriculture (USDA); National Agricultural Statistics Service (NASS). 2024. 2023 Nationwide Crop Mapping GIS Data, Released January 31, 2024. Available at: https://croplandcros.scinet.usda.gov/.

United States Department of Agriculture (USDA). 1993. National Engineering Handbook. Chapter 2, part 623, Irrigation water requirements. Washington, D.C.: U.S. Dept. Of Agriculture, Soil Conservation Service.

Attachment A. GEEEO Computational Approach Details

Figures A-1 and A-2, below, present a schematic of the GEEEO computational approach as it has been developed and is being generally applied to support Annual Report Development.

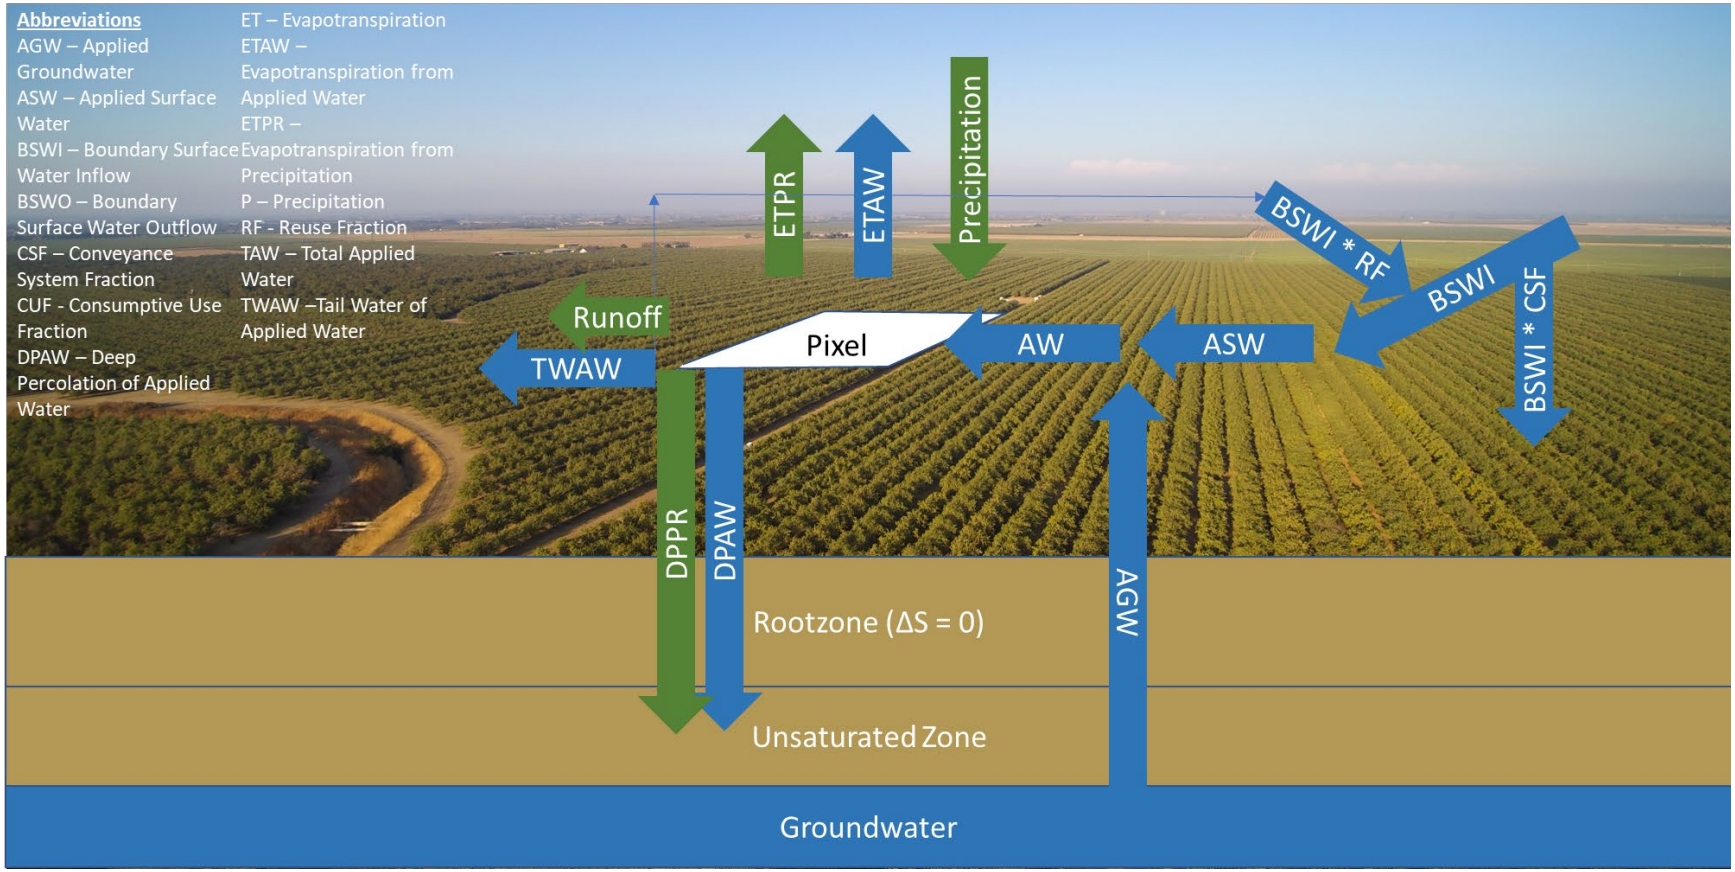


Figure A-1. Inflows and Outflows to Each 30 m x 30 m Pixel in the GEEEO Process.

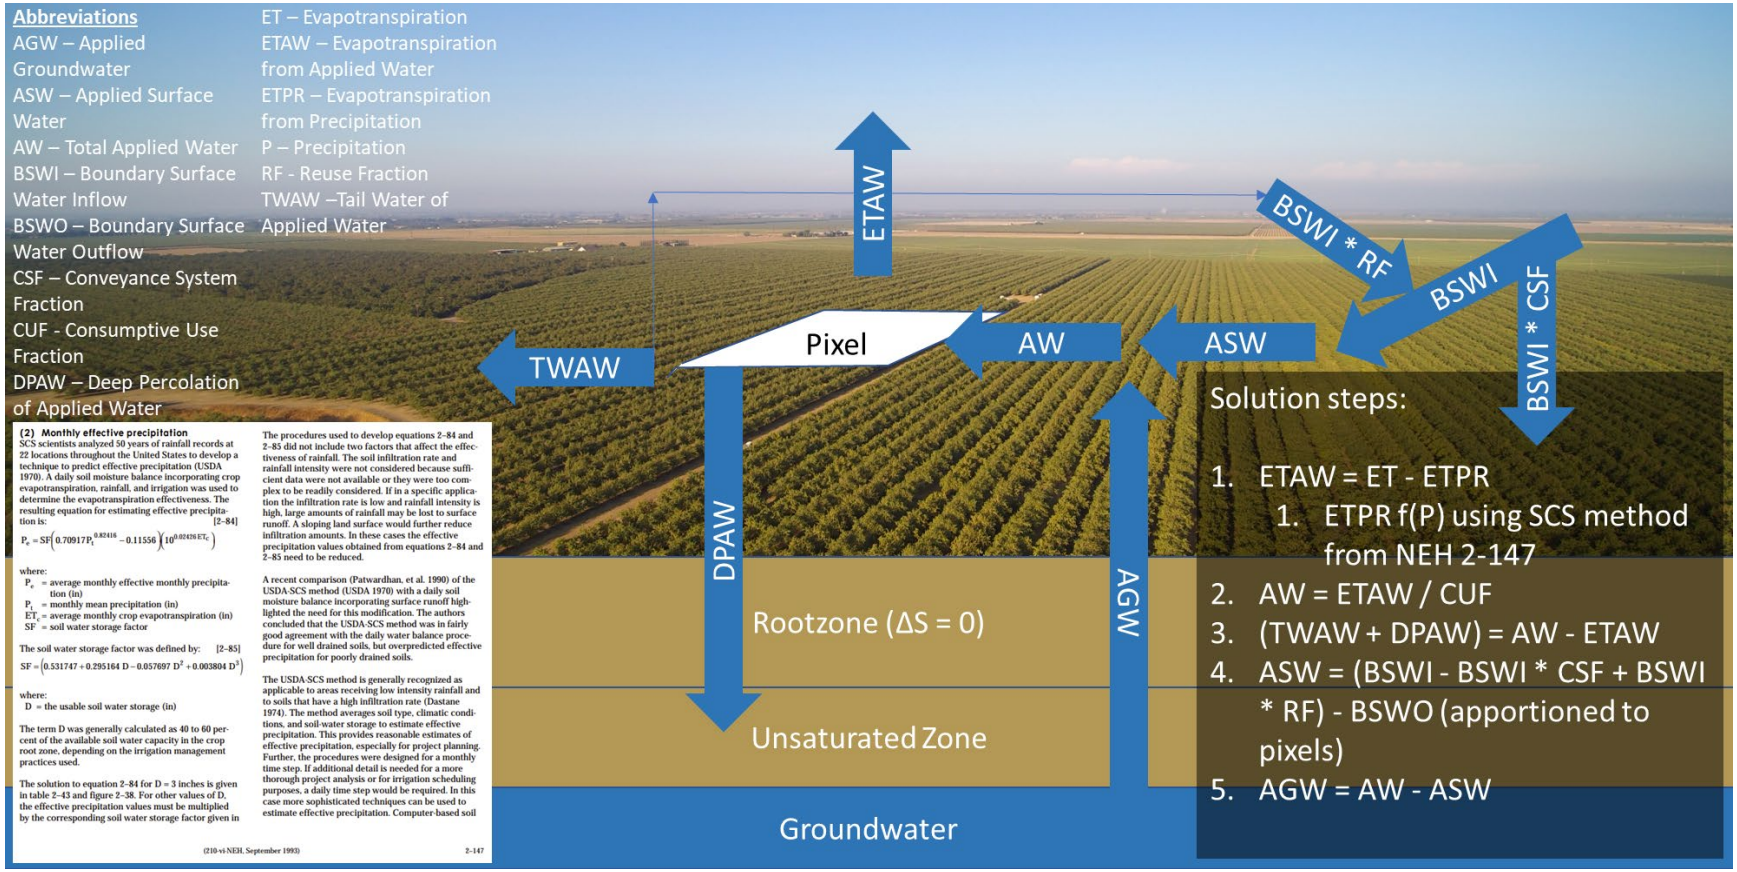


Figure A-2. Solution Steps for Calculating Applied Groundwater (AGW) in Each 30 m x 30 m Pixel in the GEEEO Process.

Water Year 2023 Annual Report

Appendix F

Water Quality

Measurable Objectives, Minimum Thresholds, and Water Quality of Representative Monitoring Site Wells				
Representative Monitoring Site (RMS) ID	TDS (mg/L)			
	MO	MT	2024	Exceed MT?
Upper Aquifer				
Ant-1U	500	750	310	-
Ant-3U	500	750	180	-
Ant-4U	500	750	390	-
Upper Aquifer				
Ant-5L	500	750	280	-

February 7, 2024

Lab No. : CH 2470693
Customer No. : 7010503

Luhdorff & Scalmanini Consulting
Attn: Eddy Teasdale
550 Salem Street, Suite 3
Chico, CA 95928

Laboratory Report

Introduction: This report package contains a total of 6 pages divided into 3 sections:

Case Narrative	(1 page)	: An overview of the work performed at FGL.
Sample Results	(4 pages)	: Results for each sample submitted.
Quality Control	(1 page)	: Supporting Quality Control (QC) results.

Case Narrative

This Case Narrative pertains to the following samples:

Sample Description	Date Sampled	Date Received	FGL Lab No.	Matrix
ANT-1U	01/25/2024	01/25/2024	CH 2470693-001	GW
TSS-4U	01/25/2024	01/25/2024	CH 2470693-002	MW
TSS-4L	01/25/2024	01/25/2024	CH 2470693-003	MW
ANT-3U	01/25/2024	01/25/2024	CH 2470693-004	GW

Sampling and Receipt Information:

All samples were received in acceptable condition and within temperature requirements, unless noted on the Condition Upon Receipt (CUR) form. All samples were received, prepared and analyzed within the method specified holding times. All samples arrived on ice. All samples were checked for pH if acid or base preservation is required (except for VOAs). For details of sample receipt information, please see the associated Chain of Custody and Condition Upon Receipt Form.

Quality Control: All samples were prepared and analyzed according to established quality control criteria. Any exceptions are noted in the Quality Control Section of this report.

Test Summary	
SM 2540 C	Preparation and analysis performed by FGL-Santa Paula (FGL-SP ELAP# 1573)
SM 4500-NO3 F	Preparation and analysis performed by FGL-Santa Paula (FGL-SP ELAP# 1573)

Certification: I certify that this data package is in compliance with ELAP standards, both technically and for completeness, except for any conditions listed above and in the QC Section. Release of the data contained in this data package is authorized by the Laboratory Director or his designee, as verified by the following electronic signature. This report shall not be reproduced except in full, without the written approval of the laboratory.

KD: SMH

Approved By **Kelly A. Dunnahoo, B.S.** Digitally signed by Kelly A. Dunnahoo, B.S.
Title: Laboratory Director
Date: 2024-02-08

Corporate Offices & Laboratory
853 Corporation Street
Santa Paula, CA 93060
TEL: (805)392-2000
Env FAX: (805)525-4172 / Ag FAX: (805)392-2063
CA ELAP Certification No. 1573

Office & Laboratory
2500 Stagecoach Road
Stockton, CA 95215
TEL: (209)942-0182
FAX: (209)942-0423
CA ELAP Certification No. 1563

Office & Laboratory
563 E. Lindo Avenue
Chico, CA 95926
TEL: (530)343-5818
FAX: (530)343-3807
CA ELAP Certification No. 2670

Office & Laboratory
3442 Empresa Drive, Suite D
San Luis Obispo, CA 93401
TEL: (805)783-2940
FAX: (805)783-2912
CA ELAP Certification No. 2775

Office & Laboratory
9415 W. Goshen Avenue
Visalia, CA 93291
TEL: (559)734-9473
FAX: (559)734-8435
CA ELAP Certification No. 2810

February 7, 2024

Luhdorff & Scalmanini Consulting
Attn: Eddy Teasdale
550 Salem Street, Suite 3
Chico, CA 95928

Description : ANT-1U
Project : Luhdorff & Scalmanini Consulting

Lab No. : CH 2470693-001
Customer No. : 7010503

Sampled On : January 25, 2024 at 10:45
Sampled By : ED, KW, CH
Received On : January 25, 2024 at 16:20
Matrix : Ground Water

Sample Results - Inorganic

Constituent	Result	RL	Units	Note	Dil.	DQF	Sample Preparation			Sample Analysis			
Wet Chemistry							Date	Time	Who	Method	Date	Time	Who
Nitrate Nitrogen	8.4	0.4	mg/L		1		01/26/2024	15:00	ilp	SM 4500-NO3 F	01/26/2024	15:47	ilp
Total Dissolved Solids (TFR)	310	20	mg/L		1		01/26/2024	15:30	ctl	SM 2540 C	01/29/2024	10:00	ctl

DQF Flags Definition:

ND=Non-Detected, RL=Reporting Level , Dil.=Dilution

Corporate Offices & Laboratory
853 Corporation Street
Santa Paula, CA 93060
TEL: (805)392-2000
Env FAX: (805)525-4172 / Ag FAX: (805)392-2063
CA ELAP Certification No. 1573

Office & Laboratory
2500 Stagecoach Road
Stockton, CA 95215
TEL: (209)942-0182
FAX: (209)942-0423
CA ELAP Certification No. 1563

Office & Laboratory
563 E. Lindo Avenue
Chico, CA 95926
TEL: (530)343-5818
FAX: (530)343-3807
CA ELAP Certification No. 2670

Office & Laboratory
3442 Empresa Drive, Suite D
San Luis Obispo, CA 93401
TEL: (805)783-2940
FAX: (805)783-2912
CA ELAP Certification No. 2775

Office & Laboratory
9415 W. Goshen Avenue
Visalia, CA 93291
TEL: (559)734-9473
FAX: (559)734-8435
CA ELAP Certification No. 2810

February 7, 2024

Luhdorff & Scalmanini Consulting
Attn: Eddy Teasdale
550 Salem Street, Suite 3
Chico, CA 95928

Description : TSS-4U
Project : Luhdorff & Scalmanini Consulting

Lab No. : CH 2470693-002
Customer No. : 7010503

Sampled On : January 25, 2024 at 11:00
Sampled By : ED, KW, CH
Received On : January 25, 2024 at 16:20
Matrix : Monitoring Well

Sample Results - Inorganic

Constituent	Result	RL	Units	Note	Dil.	DQF	Sample Preparation			Sample Analysis			
Wet Chemistry							Date	Time	Who	Method	Date	Time	Who
Nitrate Nitrogen	6.0	0.4	mg/L		1		01/26/2024	15:00	ilp	SM 4500-NO3 F	01/26/2024	15:49	ilp
Total Dissolved Solids (TFR)	390	20	mg/L		1		01/26/2024	15:30	ctl	SM 2540 C	01/29/2024	10:00	ctl

DQF Flags Definition:

ND=Non-Detected, RL=Reporting Level , Dil.=Dilution

Corporate Offices & Laboratory
853 Corporation Street
Santa Paula, CA 93060
TEL: (805)392-2000
Env FAX: (805)525-4172 / Ag FAX: (805)392-2063
CA ELAP Certification No. 1573

Office & Laboratory
2500 Stagecoach Road
Stockton, CA 95215
TEL: (209)942-0182
FAX: (209)942-0423
CA ELAP Certification No. 1563

Office & Laboratory
563 E. Lindo Avenue
Chico, CA 95926
TEL: (530)343-5818
FAX: (530)343-3807
CA ELAP Certification No. 2670

Office & Laboratory
3442 Empresa Drive, Suite D
San Luis Obispo, CA 93401
TEL: (805)783-2940
FAX: (805)783-2912
CA ELAP Certification No. 2775

Office & Laboratory
9415 W. Goshen Avenue
Visalia, CA 93291
TEL: (559)734-9473
FAX: (559)734-8435
CA ELAP Certification No. 2810

February 7, 2024

Luhdorff & Scalmanini Consulting
Attn: Eddy Teasdale
550 Salem Street, Suite 3
Chico, CA 95928

Description : TSS-4L
Project : Luhdorff & Scalmanini Consulting

Lab No. : CH 2470693-003
Customer No. : 7010503

Sampled On : January 25, 2024 at 11:00
Sampled By : ED, KW, CH
Received On : January 25, 2024 at 16:20
Matrix : Monitoring Well

Sample Results - Inorganic

Constituent	Result	RL	Units	Note	Dil.	DQF	Sample Preparation			Sample Analysis			
Wet Chemistry							Date	Time	Who	Method	Date	Time	Who
Nitrate Nitrogen	0.5	0.4	mg/L		1		01/26/2024	15:00	ilp	SM 4500-NO3 F	01/26/2024	15:52	ilp
Total Dissolved Solids (TFR)	280	20	mg/L		1		01/26/2024	15:30	ctl	SM 2540 C	01/29/2024	10:00	ctl

DQF Flags Definition:

ND=Non-Detected, RL=Reporting Level , Dil.=Dilution

Corporate Offices & Laboratory
853 Corporation Street
Santa Paula, CA 93060
TEL: (805)392-2000
Env FAX: (805)525-4172 / Ag FAX: (805)392-2063
CA ELAP Certification No. 1573

Office & Laboratory
2500 Stagecoach Road
Stockton, CA 95215
TEL: (209)942-0182
FAX: (209)942-0423
CA ELAP Certification No. 1563

Office & Laboratory
563 E. Lindo Avenue
Chico, CA 95926
TEL: (530)343-5818
FAX: (530)343-3807
CA ELAP Certification No. 2670

Office & Laboratory
3442 Empresa Drive, Suite D
San Luis Obispo, CA 93401
TEL: (805)783-2940
FAX: (805)783-2912
CA ELAP Certification No. 2775

Office & Laboratory
9415 W. Goshen Avenue
Visalia, CA 93291
TEL: (559)734-9473
FAX: (559)734-8435
CA ELAP Certification No. 2810

February 7, 2024

Luhdorff & Scalmanini Consulting
Attn: Eddy Teasdale
550 Salem Street, Suite 3
Chico, CA 95928

Description : ANT-3U
Project : Luhdorff & Scalmanini Consulting

Lab No. : CH 2470693-004
Customer No. : 7010503

Sampled On : January 25, 2024 at 11:45
Sampled By : ED, KW, CH
Received On : January 25, 2024 at 16:20
Matrix : Ground Water

Sample Results - Inorganic

Constituent	Result	RL	Units	Note	Dil.	DQF	Sample Preparation			Sample Analysis			
Wet Chemistry							Date	Time	Who	Method	Date	Time	Who
Nitrate Nitrogen	ND	0.4	mg/L		1	U	01/26/2024	13:30	ilp	SM 4500-NO3 F	01/26/2024	15:15	ilp
Total Dissolved Solids (TFR)	180	20	mg/L		1		01/29/2024	12:30	ctl	SM 2540 C	01/30/2024	11:00	ctl

DQF Flags Definition:
U Constituent results were non-detect.

ND=Non-Detected, RL=Reporting Level , Dil.=Dilution

Page 5 of 6

Corporate Offices & Laboratory
853 Corporation Street
Santa Paula, CA 93060
TEL: (805)392-2000
Env FAX: (805)525-4172 / Ag FAX: (805)392-2063
CA ELAP Certification No. 1573

Office & Laboratory
2500 Stagecoach Road
Stockton, CA 95215
TEL: (209)942-0182
FAX: (209)942-0423
CA ELAP Certification No. 1563

Office & Laboratory
563 E. Lindo Avenue
Chico, CA 95926
TEL: (530)343-5818
FAX: (530)343-3807
CA ELAP Certification No. 2670

Office & Laboratory
3442 Empresa Drive, Suite D
San Luis Obispo, CA 93401
TEL: (805)783-2940
FAX: (805)783-2912
CA ELAP Certification No. 2775

Office & Laboratory
9415 W. Goshen Avenue
Visalia, CA 93291
TEL: (559)734-9473
FAX: (559)734-8435
CA ELAP Certification No. 2810

February 7, 2024

Luhdorff & Scalmanini Consulting

Lab No. : CH 2470693
Customer No. : 7010503

Quality Control - Wet Chem

Constituent	Method	Date/ID	Type	Units	Conc.	QC Data	DQO	Note
Wet Chem								
Solids, Total Dissolved	2540CE	01/26/2024:201026CTL	Blank	mg/L		ND	<20	
			LCS	mg/L	992.0	104%	90-110	
		(STK2431324-001)	Dup	mg/L		0.8%	5	
		(STK2431324-001)	Dup	mg/L		1.87%	5	
	2540CE	01/29/2024:201103CTL	Blank	mg/L		ND	<20	
			LCS	mg/L	992.0	102%	90-110	
		(SP 2401364-002)	Dup	mg/L		1.70%	5	
		(SP 2401364-002)	Dup	mg/L		0.06%	5	
Nitrate Nitrogen	4500NO3F	01/26/2024:201034ILP	Blank	mg/L		ND	<0.4	
			LCS	mg/L	11.22	98.9%	80-120	
			MS	mg/L	5.609	103%	66-125	
		(VI 2440677-001)	MSD	mg/L	5.609	102%	66-125	
			MSRPD	mg/L		0.4%	≤30.4	
			Blank	mg/L		ND	<0.4	
			LCS	mg/L	11.22	98.9%	80-120	
			MS	mg/L	5.609	93.2%	66-125	
		(VI 2440677-002)	MSD	mg/L	5.609	92.8%	66-125	
			MSRPD	mg/L		0.2%	≤30.4	

Definition

Blank : Method Blank - Prepared to verify that the preparation process is not contributing contamination to the samples.

DQO : Data Quality Objective - This is the criteria against which the quality control data is compared.

Dup : Duplicate Sample - A random sample with each batch is prepared and analyzed in duplicate. The relative percent difference is an indication of precision for the preparation and analysis.

LCS : Laboratory Control Standard/Sample - Prepared to verify that the preparation process is not affecting analyte recovery.

MS : Matrix Spikes - A random sample is spiked with a known amount of analyte. The recoveries are an indication of how that sample matrix affects analyte recovery.

MSD : Matrix Spike Duplicate of MS/MSD pair - A random sample duplicate is spiked with a known amount of analyted. The recoveries are an indication of how that sample matrix affects analyte recovery.

MSRPD : MS/MSD Relative Percent Difference (RPD) - The MS relative percent difference is an indication of precision for the preparation and analysis.

ND : Non-detect - Result was below the DQO listed for the analyte.

Corporate Offices & Laboratory
853 Corporation Street
Santa Paula, CA 93060
TEL: (805)392-2000
Env FAX: (805)525-4172 / Ag FAX: (805)392-2063
CA ELAP Certification No. 1573

Office & Laboratory
2500 Stagecoach Road
Stockton, CA 95215
TEL: (209)942-0182
FAX: (209)942-0423
CA ELAP Certification No. 1563

Office & Laboratory
563 E. Lindo Avenue
Chico, CA 95926
TEL: (530)343-5818
FAX: (530)343-3807
CA ELAP Certification No. 2670

Office & Laboratory
3442 Empresa Drive, Suite D
San Luis Obispo, CA 93401
TEL: (805)783-2940
FAX: (805)783-2912
CA ELAP Certification No. 2775

Office & Laboratory
9415 W. Goshen Avenue
Visalia, CA 93291
TEL: (559)734-9473
FAX: (559)734-8435
CA ELAP Certification No. 2810

ENVIRONMENTAL AGRICULTURAL
Analytical Chemists

www.fglinc.com

CHAIN OF CUSTODY
AND ANALYSIS REQUEST DOCUMENT

Client: Luhdorff & Scalmanini Consulting
Customer Number: 7010503
Address: Attn: Eddy Teasdale
550 Salem Street, Suite 3
Chico, CA 95928
Phone: (530)661-0109 Fax:
Email Address: eteasdale@lsce.com
Contact Person: Eddy Teasdale
Project Name:
Purchase Order Number:
Quote Number:

Rush Analysis: ☐ 5 Day ☐ 4 Day ☐ 3 Day ☐ 2 Day ☐ 24 hour
Rush pre-approval by lab (initals): _____
Electronic Data Transfer: ☐ No ☐ State ☐ Client Other: _____

Sampler(s): E Davis
K Waddell
C Hoover
Sampling Fee: _____ Pickup Fee: _____
Compositor Setup Date: _____ Time: _____

Lab Number: 2470693

TEST DESCRIPTION AND ANALYSES REQUESTED

Samp Num	Location Description	Date Sampled	Time Sampled	Method of Sampling: Composite (C) Grab (G)	Number of Containers	Type of Containers: (G)Glass (P)Plastic (V)VOA (MT)Metal Tube	Potable (P) Non-Potable (NP) Ag Water (AgW)	(SW) Surface Water (MW) Monitoring Well (GW) Ground Water (TB) Travel Blank (WW) Waste Water (DW) Drinking Water	(S) Soil (SLG) Sludge (SLD) Solid (O) Oil	BacT: (Sys) System (SRC) Source (W) Waste	BacT: (ROUT)Routine (RPT)Repeat (OTH)Other (RPL)Replace	(LT) Leaf Tissue (PET) Petiole Tissue (PRD) Produce	Preservative: (1) NaOH + ZnAc, (2) NaOH, (3) HCl (4) H2SO4, (5) HNO3, (6) Na2S2O3, (7) Other _____	Total Dissolved Solids	Nitrate
1	AnT - 1U	1/25	1045	G	2	P		GW						X	X
2	TSS - 4U	1/25	1100	↓	2	↓		MW						↓	↓
3	TSS - 4L	1/25	1100		2			MW							
4	AnT - 3U	1/25	1145	↓	2	↓		GW						↓	↓

Remarks

Relinquished	Date:	Time:	Relinquished	Date:	Time:	Relinquished	Date:	Time:
	1/25/24	1620		1/25	1700	GLS	1/26/24	1230
Received By:	**Date:**	**Time:**	**Received By:**	**Date:**	**Time:**	**Received By:**	**Date:**	**Time:**
NDI	↓	↓	GLS	↓	↓	JAW	↓	↓

Corporate Offices & Laboratory
853 Corporation Street
Santa Paula, CA 93060
TEL: (805)392-2000
Env FAX: (805)525-4172 / Ag FAX: (805)392-2063
CA ELAP Certification No.1573

Office & Laboratory
2500 Stagecoach Road
Stockton, CA 95215
TEL: (209)942-0182
FAX: (209)942-0423
CA ELAP Certification No. 1563

Office & Laboratory
563 E. Lindo Avenue
Chico, CA 95926
TEL: (530)343-5818
FAX: (530)343-3807
CA ELAP Certification No. 2670

Office & Laboratory
3442 Empresa Drive, Suite D
San Luis Obispo, CA 93401
TEL: (805)783-2940
FAX: (805)783-2912
CA ELAP Certification No. 2775

Office & Laboratory
9415 W. Goshen Avenue
Visalia, CA 93291
TEL: (559)734-9473
FAX: (559)734-8435
CA ELAP Certification No. 2810

2470643

Inter-Laboratory Condition Upon Receipt (Attach to COC)

Sample Receipt at: CC CH STK VI

1. Number of ice chests/packages received: 0Tc Shipping tracking #(s):_____

2. Temp IR Gun ID #: 1CW12
3. Were samples received on ice? (Yes) No Temps: 11.5°C / / / /
   Surface water SWTR bact samples: A sample that has a temperature upon receipt of >10° C, whether iced or not, should be flagged unless the time since sample collection has been less than two hours.

4.	Do the number of bottles received agree with the COC?	(Yes)	No	N/A
5.	Were samples received intact? (i.e. no broken bottles, leaks etc.)	(Yes)	No	
6.	VOAs checked for Headspace?	Yes	No	(N/A)
7.	Were all analyses within holding times at time of receipt?	(Yes)	No	
8.	Verify sample date, time and sampler name	(Yes)	No	

Sign and date the COC, place in a ziplock and put in the same ice chest as the samples.
Sample Receipt Review completed by (initials): HPD
*Sample - 3 received 1/2 full amber as received

Sample Receipt at SP:

1. Number of ice chests/packages received: 2 Shipping tracking #(s): 560848014 9

2. Temp IR Gun ID #: TH208
3. Were samples received on ice? (Yes) No Temps: 1C / / / /
   Acceptable is above freezing to 6°C. If many packages are received at one time check for tests/H.T.'s/rushes/

4.	Do the number of bottles received agree with the COC?	(Yes)	No	N/A
5.	Were samples received intact? (i.e. no broken bottles, leaks etc.)	(Yes)	No	

Sign and date the COC, obtain LIMS sample numbers, select methods/tests and print labels.

Sample Verification, Labeling and Distribution:

1.	Were all requested analyses understood and acceptable?	(Yes)	No	
2.	Did bottle labels correspond with the client's ID's?	(Yes)	No	
3.	Were all bottles requiring sample preservation properly preserved? [Exception: Oil & Grease, VOA and CrVI verified in lab]	Yes	No	(N/A) FGL
4.	VOAs checked for Headspace?	Yes	No	(N/A)
5.	Have rush or project due dates been checked and accepted?	Yes	No	(N/A)
6.	Were all analyses within holding times at time of receipt?	(Yes)	No	

Attach labels to the containers and include a copy of the COC for lab delivery.
Sample Receipt, Login and Verification completed by (initials): JW

Discrepancy Documentation:


Any items above which are "No" or do not meet specifications (i.e. temps) must be resolved.


1. Person Contacted:_____ Phone Number:_____
   Initiated By:_____ Date:_____
   Problem:
   Resolution:


2. Person Contacted:_____ Phone Number:_____
   Initiated By:_____ Date:_____
   Problem:
   Resolution:


(Please use the back of this sheet for additional comments or cor


(7010503)
Luhdorff & Scalmanini Consulting
CH 2470693
jaw 01/26/2024 09:02:50
CH 2470693

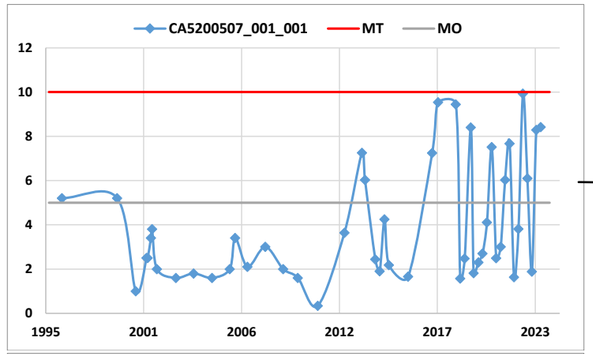


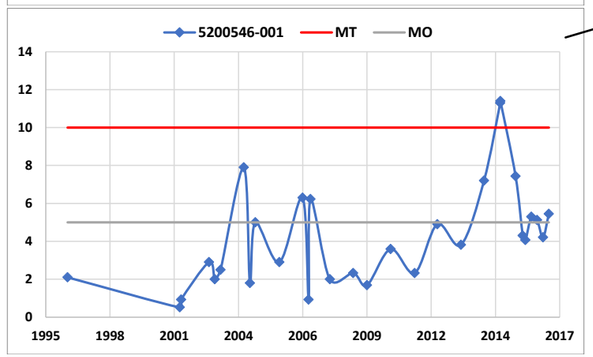


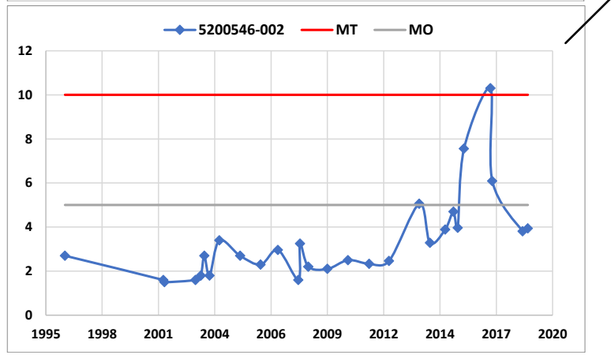

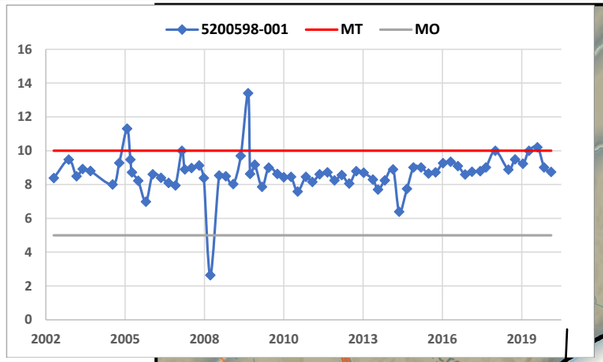

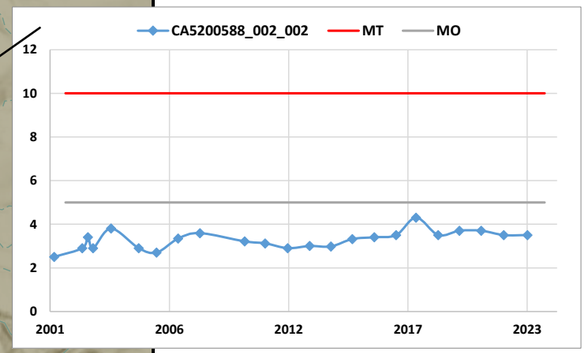

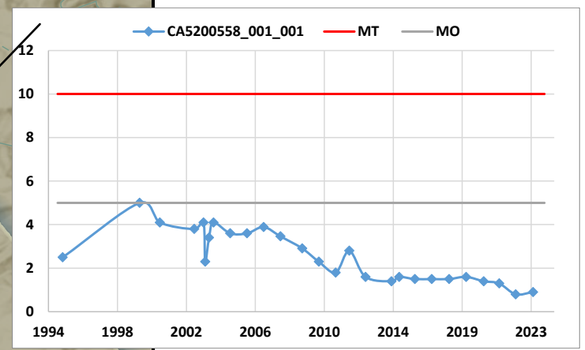

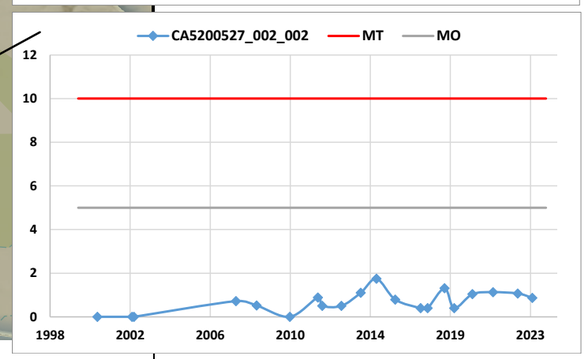



P:\Tehama County\Tehama County GSP Services\GAMANO3N.aprx


Luhdorff & Scalmanini
Consulting Engineers


Location of Wells with Nitrate as N Results


Antelope Subbasin
GSP Implementation

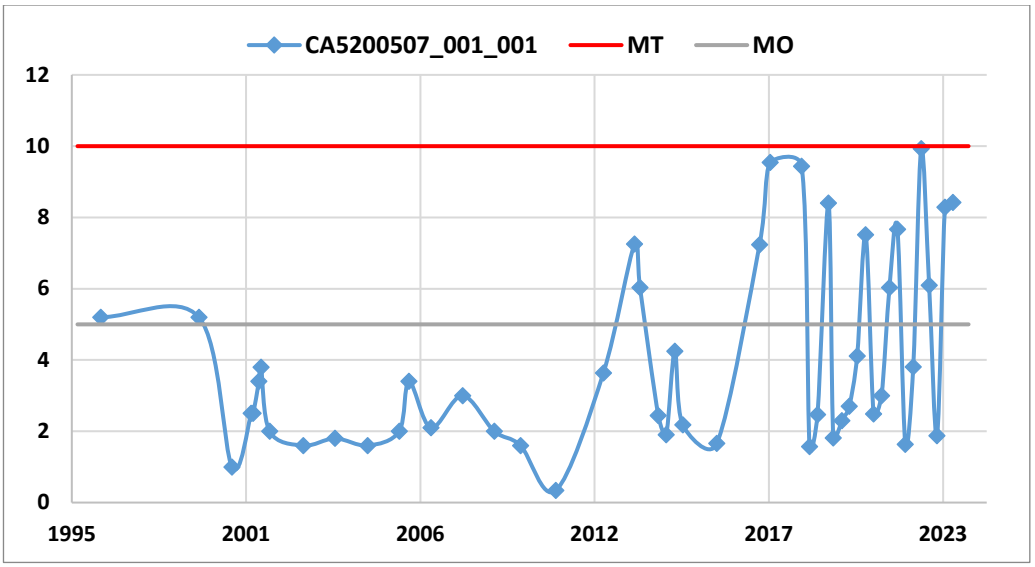

CA5200507_001_001
MT
MO
12
10
8
6
4
2
0
1995
2001
2006
2012
2017
2023

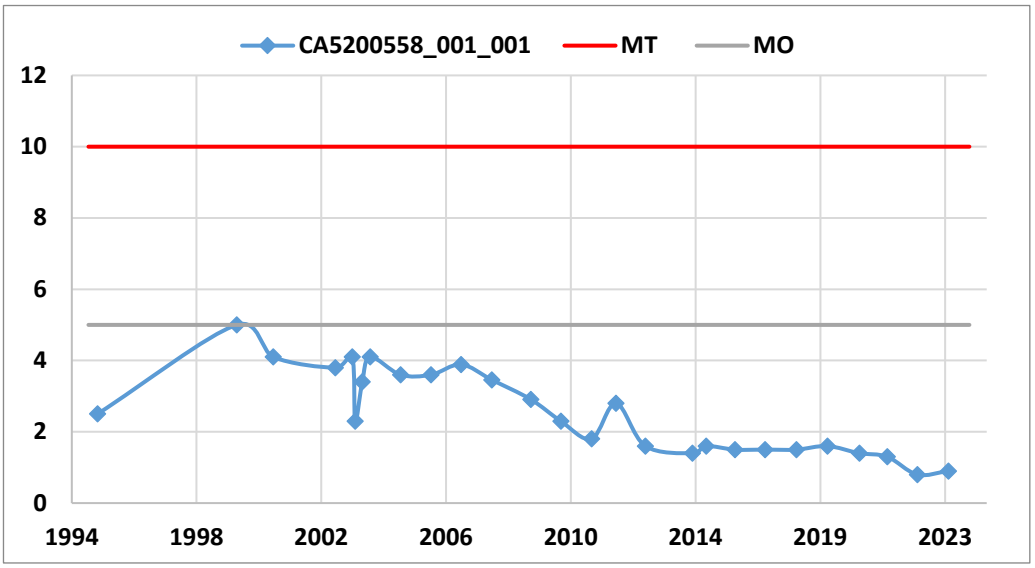

CA5200558_001_001
MT
MO
12
10
8
6
4
2
0
1994
1998
2002
2006
2010
2014
2019
2023

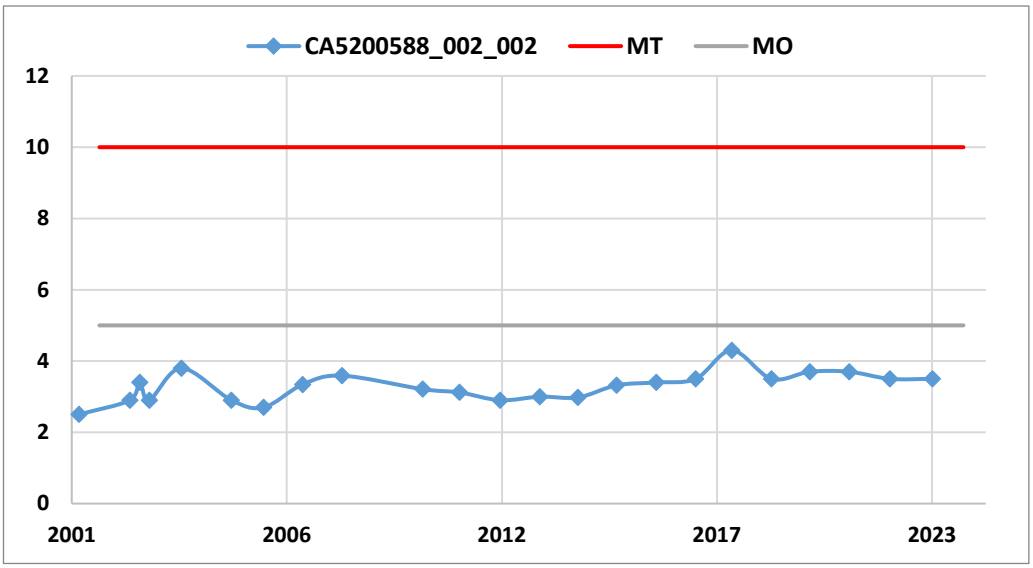

CA5200588_002_002
MT
MO
12
10
8
6
4
2
0
2001
2006
2012
2017
2023

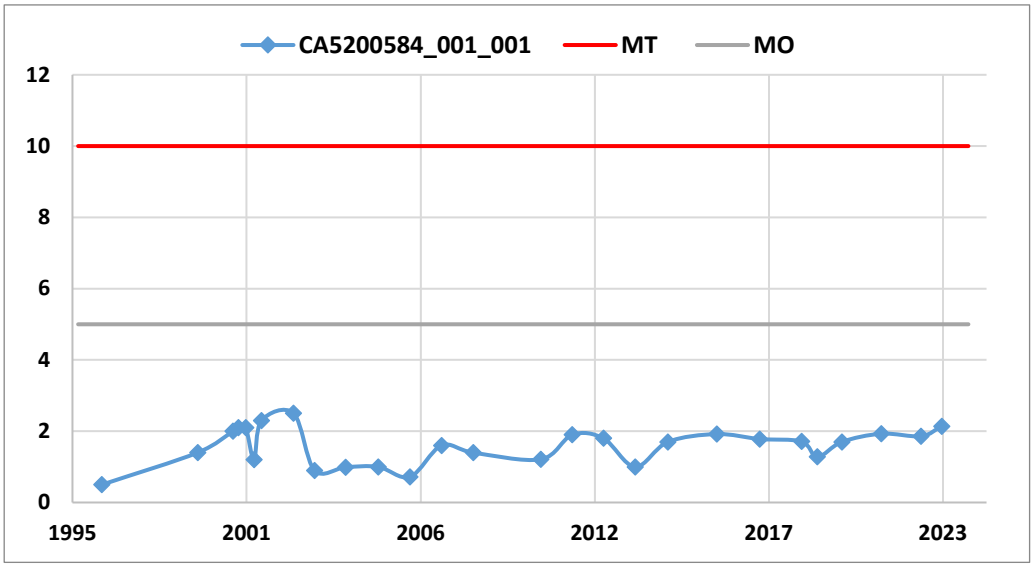
CA5200584_001_001
MT
MO
12
10
8
6
4
2
0
1995
2001
2006
2012
2017
2023

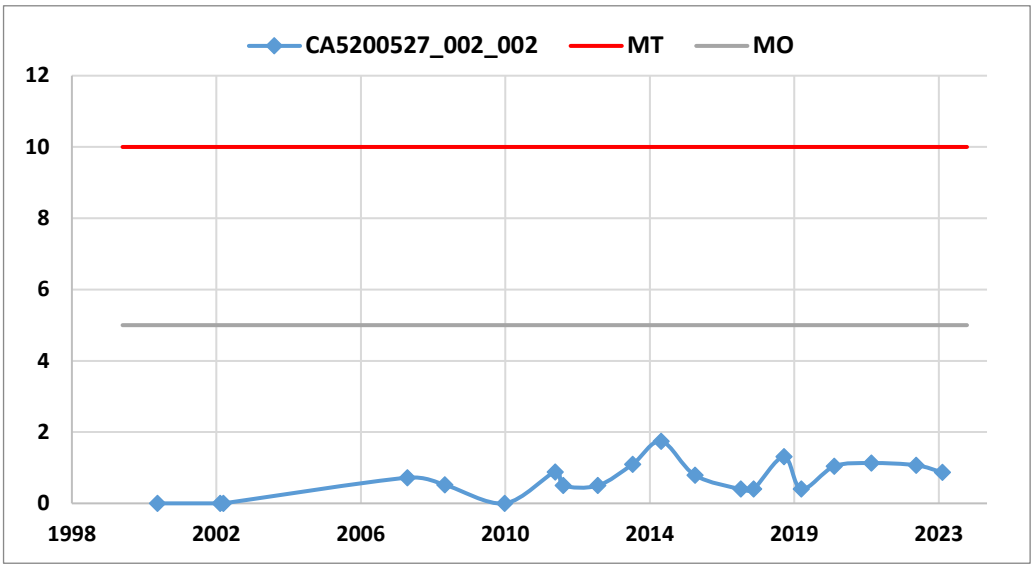
CA5200527_002_002
MT
MO
12
10
8
6
4
2
0
1998
2002
2006
2010
2014
2019
2023

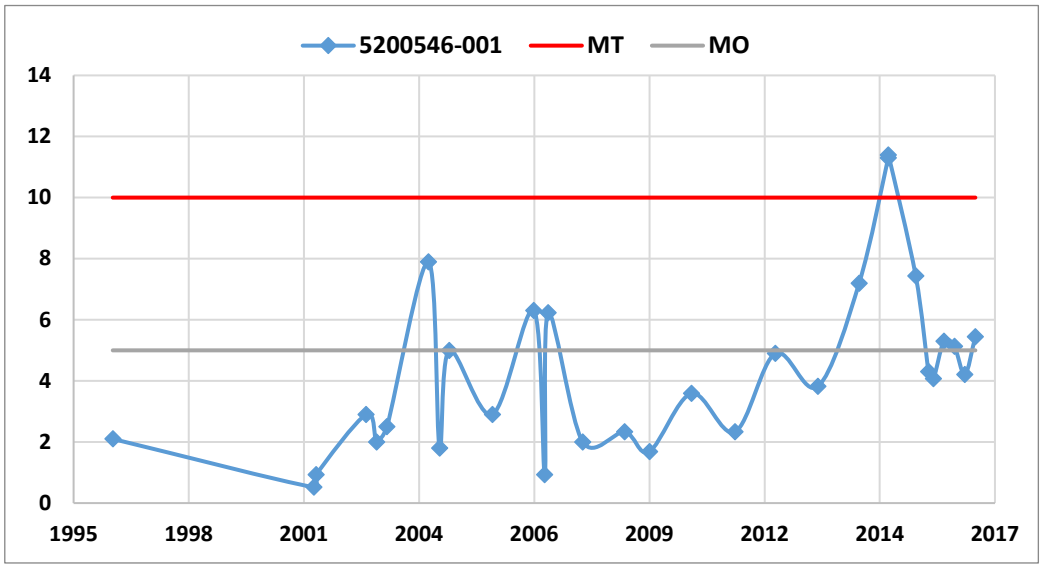
5200546-001
MT
MO
14
12
10
8
6
4
2
0
1995
1998
2001
2004
2006
2009
2012
2014
2017

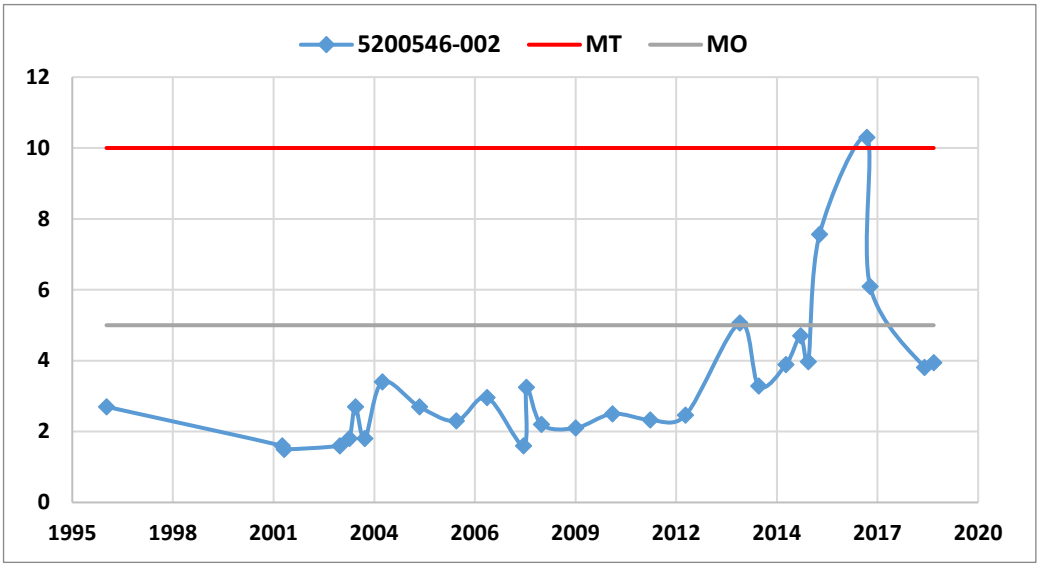
5200546-002
MT
MO
12
10
8
6
4
2
0
1995
1998
2001
2004
2006
2009
2012
2014
2017
2020

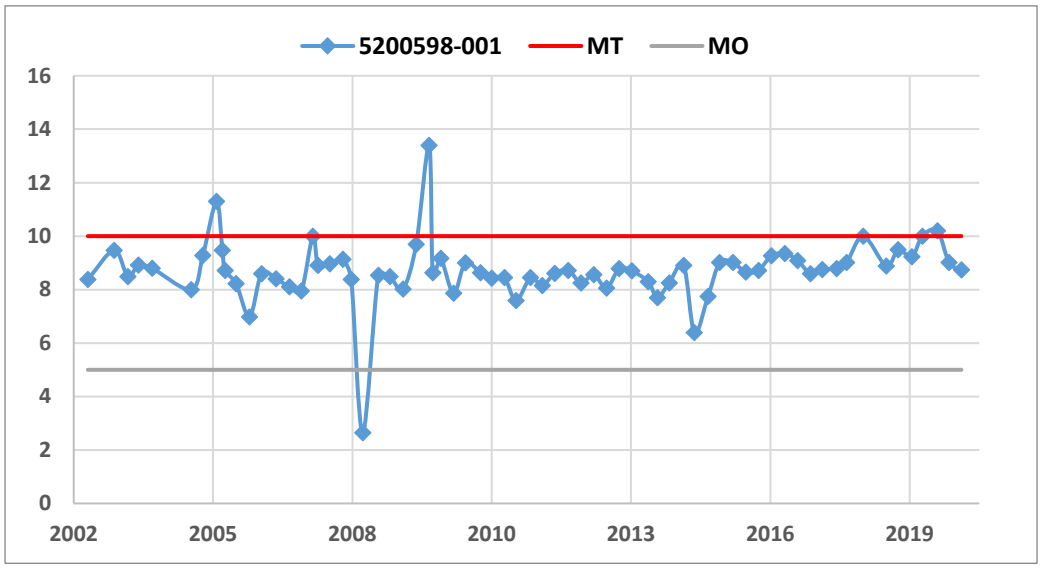
5200598-001
MT
MO
16
14
12
10
8
6
4
2
0
2002
2005
2008
2010
2013
2016
2019